

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 June 2001 (07.06.2001)

PCT


(10) International Publication Number  
**WO 01/41318 A2**

(51) International Patent Classification<sup>7</sup>: **H04B**  
(21) International Application Number: **PCT/KR00/01385**  
(22) International Filing Date:  
30 November 2000 (30.11.2000)  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data:  
1999/54963 4 December 1999 (04.12.1999) KR  
(71) Applicant (for all designated States except US): **KOREA  
ADVANCED INSTITUTE OF SCIENCE AND TECH-  
NOLOGY [KR/KR]; #373-1, Kusong-dong, Yusong-gu,  
Taejon 305-701 (KR).**

(72) Inventors; and  
(75) Inventors/Applicants (for US only): **KIM, Jong,  
Myeong [KR/KR]; 108-203, Jugong APT, Ok Po 2dong,  
Keoje, Kyung Nam 656-132 (KR). PARK, Su, Won  
[KR/KR]; Department of Electrical Engineering, KAIST,  
Kusong-Dong, Yusong-Ku, Taejon 305-701 (KR). SUNG,  
Dan, Keun [KR/KR]; 103-1503, Hanwool APT, Shin  
Sung-Dong, Yusong-Ku, Taejon 305-345 (KR).**  
(74) Agent: **LEE, Jong, II; #904 BYC Building, 648-1, Yeok-  
sam-dong, Kangnam-ku, Seoul 135-080 (KR).**  
(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: TRANSMISSION AND RECEIVING USING SPREADING MODULATION FOR SPREAD SPECTRUM COMMUNICATIONS AND THEREOF APPARATUS

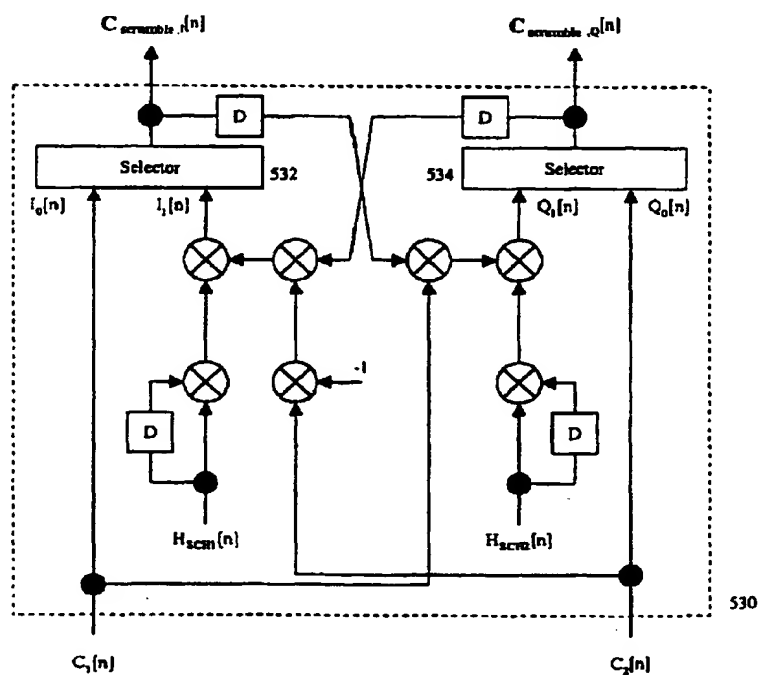

(57) Abstract: The present invention is related to a method and an apparatus for the orthogonal complex-domain spreading modulation in CDMA spread spectrum communication system when there are channels with statistically higher transmitting power. In CDMA spread spectrum communication systems with a transmitter and a receiver, the transmitter according to the invention has several channels with different information. Two channels with higher power than the others, which are spread in the conventional scheme, are spread with the orthogonal codes using a complex-domain multiplier. The spread signals are added. Then the signal are scrambled using a complex-domain multiplier with secondary scrambling sequences generated by a special scrambling code generator with primary scrambling sequences as inputs. The receiver does reverse operation of the transmitter.



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *Without international search report and to be republished upon receipt of that report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**TRANSMISSION AND RECEIVING USING SPREADING  
MODULATION FOR SPREAD SPECTRUM COMMUNICATIONS AND  
THEREOF APPARATUS**

**5 TECHNICAL FIELD**

This invention is concerned with spreading modulation methods for orthogonal multiple channel transmitters in CDMA (code division multiple access) communication systems. More particularly it is related to orthogonal complex-domain spreading modulation methods for CDMA communication systems when there are channels with statistically higher transmitting power.

15

**BACKGROUND ART**

In description of the prior art, the same reference number is used for a component having the same function as that of the present invention. FIG. 1 shows a schematic diagram for a conventional CDMA transmitter with orthogonal multiple channels. The



transmitter in FIG. 1 is based on the cdma2000 system, which is one of the candidates for IMT-2000 (International Mobile Telecommunications-2000) system as a third generation mobile communication systems. The transmitter has 5 orthogonal channels: A Pilot CHannel (PiCH) used for coherent demodulation; a Dedicated Control CHannel (DCCH) for transmitting control information; a Fundamental CHannel (FCH) for transmitting low speed data such as voice; and two Supplementary CHannels (SCH; SCH1, SCH2) for high-speed data services. Each channel passes through a channel encoder and/or an interleaver (not shown in FIG. 1) according to the required quality of the channel.

Each channel performs the signal conversion process by changing a binary data {0, 1} into {+1, -1}. Even though it is explained with the changed {+1, -1}, our method can be equally applied to the information represented by several bits, for example, {00, 01, 11, 10} is changed into {+3, +1, -1, -3}. The gain for each channel is controlled based on the required quality and transmitting data rate by using

the gain controllers  $G_P(110)$ ,  $G_D(112)$ ,  $G_{S2}(114)$ ,  $G_{S1}(116)$ , and  $G_F(118)$ . The gain for each channel is determined by a specific reference gain, and the amplifiers (170, 172) control the overall gain. For example, with  $G_P = 1$ , other gain  $G_D$ ,  $G_{S2}$ ,  $G_{S1}$ , or  $G_F$  can be controlled. Gain controlled signal for each channel is spread at the spreader (120, 122, 124, 126, 128) with orthogonal Hadamard code  $W_{PICH}[n]$ ,  $W_{DCCH}[n]$ ,  $W_{SCH2}[n]$ ,  $W_{SCH1}[n]$ , or  $W_{FCH}[n]$ , and is delivered to the adder (130, 132).

Hadamard matrix,  $H^{(p)}$ , comprising the orthogonal Hadamard codes has the following four properties:

(1) The orthogonality is guaranteed between the columns and the rows of an Hadamard matrix.

When

【EQUATION 1】

$$H^{(p)} = H_{p \times p} = \begin{bmatrix} h_{0,0} & h_{0,1} & \cdots & h_{0,p-1} \\ h_{1,0} & h_{1,1} & \cdots & h_{1,p-1} \\ \vdots & \vdots & \ddots & \vdots \\ h_{p-1,0} & h_{p-1,1} & \cdots & h_{p-1,p-1} \end{bmatrix} =$$

$$\begin{bmatrix} \overline{h_0} \\ \overline{h_1} \\ \vdots \\ \overline{h_{p-1}} \end{bmatrix} = \begin{bmatrix} \overline{h_0}^T & \overline{h_1}^T & \cdots & \overline{h_{p-1}}^T \end{bmatrix}$$

and,  $h_{i,j} \in \{+1, -1\}$ ;  $i, j \in \{0, 1, 2, \dots, p-1\}$ ,

matrix  $H^{(p)}$  is a  $p \times p$  Hadamard matrix if the following equations hold.

5                                   【EQUATION 2】

$$H_{p \times p} H_{p \times p}^T = p I^{(p)}$$

$$\overline{h_i} \cdot \overline{h_j} = p \cdot \delta_{i,j}$$

Where  $I^{(p)}$  is a  $p \times p$  identity matrix,

and  $\delta_{i,j}$  is the Kronecker Delta symbol, which becomes  
10   1 for  $i=j$ , and 0 for  $i \neq j$ .

(2) It is still an Hadamard matrix  $H^{(p)}$  even if the order of the columns and the rows of an Hadamard matrix is changed.

(3) The order of Hadamard matrix  $H^{(p)}$ ,  $p$ , is 1,  
15   2, or a multiple number of 4. In other words,  
 $p \in \{1, 2\} \cup \{4n | n \in \mathbb{Z}^+\}$ , where  $\mathbb{Z}^+$  is a set of integers which are greater than 0.

(4) The  $mn \times mn$  matrix  $H^{(mn)}$  produced by the Kronecker product (as in EQUATION 3) from a  $m \times m$   
20   Hadamard matrix  $A^{(m)}$  and a  $n \times n$  Hadamard matrix  $B^{(n)}$  is

also an Hadamard matrix.

【EQUATION 3】

$$H_{mn \times mn} = A_{m \times m} \otimes B_{n \times n}$$

$$= \begin{bmatrix} a_{0,0} & a_{0,1} & \cdots & a_{0,m-1} \\ a_{1,0} & a_{1,1} & \cdots & a_{1,m-1} \\ \vdots & \vdots & \ddots & \vdots \\ a_{m-1,0} & a_{m-1,1} & \cdots & a_{m-1,m-1} \end{bmatrix} \otimes \begin{bmatrix} b_{0,0} & b_{0,1} & \cdots & b_{0,n-1} \\ b_{1,0} & b_{1,1} & \cdots & b_{1,n-1} \\ \vdots & \vdots & \ddots & \vdots \\ b_{n-1,0} & b_{n-1,1} & \cdots & b_{n-1,n-1} \end{bmatrix}$$

$$= \begin{bmatrix} b_{0,0}A & b_{0,1}A & \cdots & b_{0,n-1}A \\ b_{1,0}A & b_{1,1}A & \cdots & b_{1,n-1}A \\ \vdots & \vdots & \ddots & \vdots \\ b_{n-1,0}A & b_{n-1,1}A & \cdots & b_{n-1,n-1}A \end{bmatrix} = \begin{bmatrix} h_{0,0} & h_{0,1} & \cdots & h_{0,mn-1} \\ h_{1,0} & h_{1,1} & \cdots & h_{1,mn-1} \\ \vdots & \vdots & \ddots & \vdots \\ h_{mn-1,0} & h_{mn-1,1} & \cdots & h_{mn-1,mn-1} \end{bmatrix}$$

5

The present invention describes CDMA systems using the column vectors or row vectors of a  $2^n \times 2^n$  Hadamard matrix  $H^{(2^n)}$  as orthogonal codes, where the  $2^n \times 2^n$  Hadamard matrix  $H^{(2^n)}$  is generated from a  $2 \times 2$  Hadamard matrix as shown in EQUATION 4 ( $n = 1, 2, 3, \dots, 8$ ). In particular, the set of the column vectors or the row vectors of the produced Hadamard matrix is  $2^n$  dimensional Walsh codes.

【EQUATION 4】

$$H^{(2)} = H_{2 \times 2} = \begin{bmatrix} +1 & +1 \\ +1 & -1 \end{bmatrix} = \begin{bmatrix} W_0^{(2)} \\ W_1^{(2)} \end{bmatrix}$$

15

$$H^{(4)} = H_{4 \times 4} = H_{2 \times 2} \otimes H_{2 \times 2} = \begin{bmatrix} +1 & +1 & +1 & +1 \\ +1 & -1 & +1 & -1 \\ +1 & +1 & -1 & -1 \\ +1 & -1 & -1 & +1 \end{bmatrix} = \begin{bmatrix} W_0^{(4)} \\ W_1^{(4)} \\ W_2^{(4)} \\ W_3^{(4)} \end{bmatrix}$$

$$H^{(8)} = H_{8 \times 8} = H_{2 \times 2} \otimes H_{4 \times 4} = \begin{bmatrix} +1 & +1 & +1 & +1 & +1 & +1 & +1 & +1 \\ +1 & -1 & +1 & -1 & +1 & -1 & +1 & -1 \\ +1 & +1 & -1 & -1 & +1 & +1 & -1 & -1 \\ +1 & -1 & -1 & +1 & +1 & -1 & -1 & +1 \\ +1 & +1 & +1 & +1 & -1 & -1 & -1 & -1 \\ +1 & -1 & +1 & -1 & -1 & +1 & -1 & +1 \\ +1 & +1 & -1 & -1 & -1 & -1 & +1 & +1 \\ +1 & -1 & -1 & +1 & -1 & +1 & +1 & -1 \end{bmatrix} = \begin{bmatrix} W_0^{(8)} \\ W_1^{(8)} \\ W_2^{(8)} \\ W_3^{(8)} \\ W_4^{(8)} \\ W_5^{(8)} \\ W_6^{(8)} \\ W_7^{(8)} \end{bmatrix}$$

The orthogonal Walsh codes of the above mentioned Hadamard matrix  $H^{(p)}$  have the following property ( $p = 2^n$ ).

【EQUATION 5】

$$\begin{aligned} W_i^{(\rho)} \odot W_j^{(\rho)} &\equiv (w_{i,0}^{(\rho)}, w_{i,1}^{(\rho)}, \dots, w_{i,\rho-1}^{(\rho)}) \odot (w_{j,0}^{(\rho)}, w_{j,1}^{(\rho)}, \dots, w_{j,\rho-1}^{(\rho)}) \\ &= (w_{i,0}^{(\rho)} w_{j,0}^{(\rho)}, w_{i,1}^{(\rho)} w_{j,1}^{(\rho)}, \dots, w_{i,\rho-1}^{(\rho)} w_{j,\rho-1}^{(\rho)}) \\ &= (w_{k,0}^{(\rho)}, w_{k,1}^{(\rho)}, \dots, w_{k,\rho-1}^{(\rho)}) \\ &= W_k^{(\rho)} \end{aligned}$$

Where  $\{i, j, k\} \subset \{0, 1, 2, \dots, 2^n-1\}$ . If  $i, j, k$  are represented by binary numbers as in EQUATION 6,

【EQUATION 6】

$$i = (i_{n-1}, i_{n-2}, i_{n-3}, \dots, i_1, i_0)_2, \quad j = (j_{n-1}, j_{n-2}, j_{n-3}, \dots, j_1, j_0)_2,$$

$$k = (k_{n-1}, k_{n-2}, k_{n-3}, \dots, k_1, k_0)_2$$

the following relation holds among  $i, j, k$ :





## [EQUATION 7]

$$(k_{n-1}, k_{n-2}, k_{n-3}, \dots, k_1, k_0)_2 = (i_{n-1} \oplus j_{n-1}, i_{n-2} \oplus j_{n-2}, j_{n-3} \oplus j_{n-3}, \dots, i_1 \oplus j_1, i_0 \oplus j_0)_2$$

Here  $\oplus$  represents the eXclusive OR (XOR) operator.


Therefore,  $W_i^{(p)}[n] = W_i^{(p)}[n] W_0^{(p)}[n]$  for  $i \in \{0, 1, 2, \dots, 2^{n-1}-1\}$ , and  $W_{2k+1}^{(p)}[n] = W_{2k}^{(p)}[n] W_1^{(p)}[n]$  for  $k \in \{0, 1, 2, \dots, 2^{n-1}-1\}$ .

In order to distinguish the orthogonal multiple channels, the Hadamard matrix  $H^{(p)}$  is used, and the order of the Hadamard matrix  $H^{(p)}$ ,  $p (=2^n)$  is the Spreading Factor (SF). In direct sequence spread spectrum communication systems, the spreading bandwidth is fixed, so the transmission chip rate is also fixed. When there are several channels having different data transmission rates with a fixed transmission chip rate, the tree-structured Orthogonal Variable Spreading Factor (OVSF) codes are used (as shown in EQUATION 8) in order to recover the desired channels at the receiving terminal using the orthogonal property of the channels.

The OVSF codes with conversion ("0"  $\leftrightarrow$  "+1" and


"1"  $\leftrightarrow$  "-1") and orthogonal Walsh functions are shown in EQUATION 8 and EQUATION 9, respectively. An allocation method of the tree-structured OVSF codes with the orthogonal property is shown in the following references: (1) F. Adachi, M. Sawahashi and K. Okawa, "Tree-structured generation of orthogonal spreading codes with different lengths for forward link of DS-CDMA mobile radio," Electronics Letters, Vol.33, Jan.1997, pp27-28. (2) US Patent # US5751761, "System and method for orthogonal spread spectrum sequence generation in variable data rate systems".

【EQUATION 8】

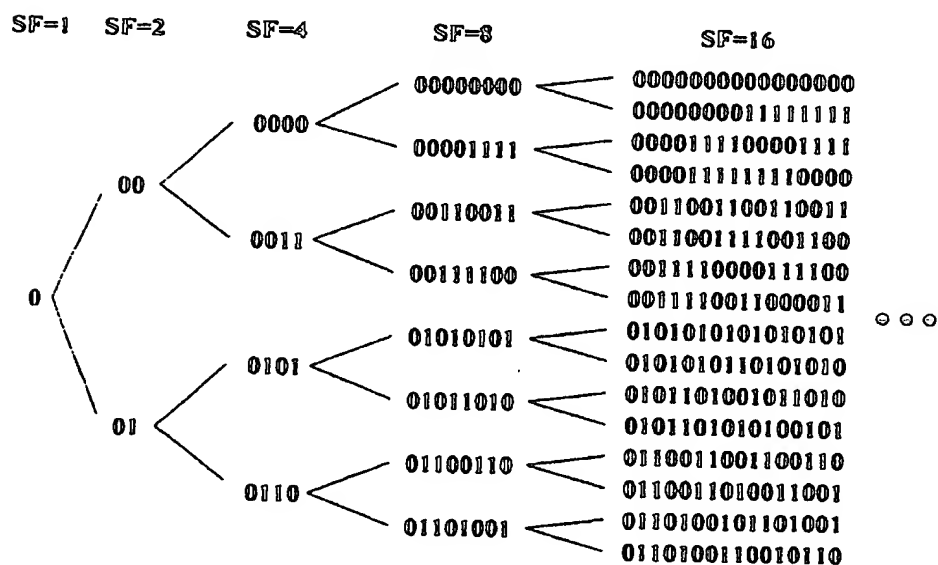

The above equation shows the OVSF codes.

【EQUATION 9】

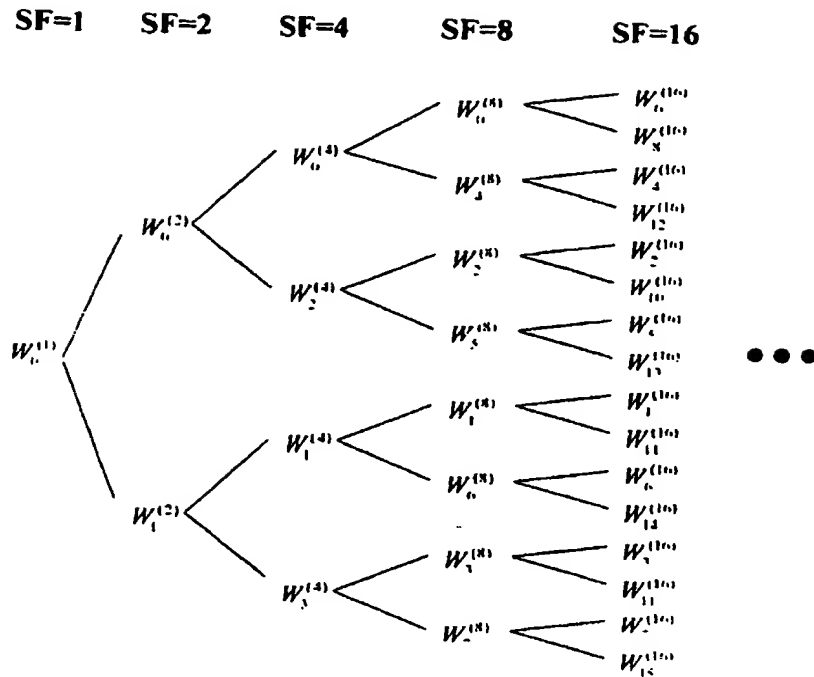

The above equation shows the relation between the  
5 OVSF codes and orthogonal Walsh codes.

The outputs  $(x_T[n], y_T[n])$  of the adder (130,  
132) in FIG. 1 can be written as the following  
equations:

【EQUATION 10】

$$\begin{aligned}
 x_T[n] &= G_P W_{PiCH}[n] D_{PiCH} \left[ \left\lfloor \frac{n}{SF_{PiCH}} \right\rfloor \right] + G_D W_{DCCH}[n] D_{DCCH} \left[ \left\lfloor \frac{n}{SF_{DCCH}} \right\rfloor \right] \\
 &\quad + G_{S2} W_{SCH2}[n] D_{SCH2} \left[ \left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor \right] \\
 y_T[n] &= G_F W_{FCH}[n] D_{FCH} \left[ \left\lfloor \frac{n}{SF_{FCH}} \right\rfloor \right] + G_{S1} W_{SCH1}[n] D_{SCH1} \left[ \left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor \right]
 \end{aligned}$$

Here  $\lfloor x \rfloor$  is a largest integer not greater than  $x$ .

The above mentioned Walsh code  $W_{PiCH}[n]$ ,  $W_{DCCH}[n]$ ,  
 5  $W_{SCH2}[n]$ ,  $W_{SCH1}[n]$ , and  $W_{FCH}[n]$  are orthogonal Walsh  
 functions selected from  $H^{(SF_{PiCH})}, H^{(SF_{DCCH})}, H^{(SF_{SCH2})}, H^{(SF_{SCH1})}, H^{(SF_{FCH})}$ .  
 An allocation method of the orthogonal Walsh  
 functions to each channel with the orthogonal  
 property follows the allocation method of the OVSF  
 10 codes.  $SF_{PiCH}$ ,  $SF_{DCCH}$ ,  $SF_{SCH2}$ ,  $SF_{SCH1}$ , and  $SF_{FCH}$  are  
 spreading factors for the corresponding channels.

For simple explanation, assume the transmitting  
 power of SCH1 and SCH2 is assumed to be  
 statistically greater than the power of PiCH, DCCH,  
 15 and FCH. (This assumption does not change the  
 present invention.) In other words, it is assumed  
 the relation  $G_{S1} > G_P + G_D + G_F$ , and  $G_{S2} > G_P + G_D + G_F$ , holds  
 statistically. The above assumptions hold in two  
 cases: In the first case, the transmission data rate

for the supplementary channel (SCH1, SCH2) is greater than that of other channels (PiCH, DCCH, FCH), and the required quality such as the signal-to-noise ratio (SNR) for each channel is comparable.

5 In the second case, the transmission data rates are comparable, and the required quality is more restricted. If there are only two channels available in a transmitter, the assumptions hold, and the two channels are allocated to SCH1 and SCH2. When the  
10 assumptions hold, EQUATION 10 can be approximated as EQUATION 11.

【EQUATION 11】

$$\begin{aligned} x_T[n] &\approx G_{S2} W_{SCH2}[n] D_{SCH2} \left[ \left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor \right] \\ y_T[n] &\approx G_{S1} W_{SCH1}[n] D_{SCH1} \left[ \left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor \right] \end{aligned}$$

The spreading modulation takes place at the  
15 Spreading Modulator (140) with the first inputs ( $x_T[n]$ ,  $y_T[n]$ ) and the second inputs, PN (Pseudo-Noise) sequences ( $C_1[n]$ ,  $C_2[n]$ ), and the outputs ( $I_T[n]$ ,  $Q_T[n]$ ) are produced. The peak transmission power to the average power ratio (PAR: Peak-to-  
20 Average Ratio) can be improved according to the

structure of the Spreading Modulator (140) and the method how to generate the scrambling codes ( $C_{\text{scramble}}$ ,  $I[n]$ ,  $C_{\text{scramble}}$ ,  $Q[n]$ ) from the inputs of the two PN sequences ( $C_1[n]$ ,  $C_2[n]$ ). Conventional embodiments  
5 for the Spreading Modulator (140) are shown in FIG. 3a ~ 3d. The outputs ( $I_T[n]$ ,  $Q_T[n]$ ) of the Spreading Modulator (140) pass through the low-pass-filters (160, 162) and the power amplifiers (170, 172). Then the amplified outputs are delivered to the  
10 modulators (180, 182) which modulate the signals into the desired frequency band using carrier. And the modulated signals are added by the adder (190), and delivered to an antenna.

FIG. 2 shows a schematic diagram for a receiver  
15 according to the transmitter of FIG. 1. The received signals passed through an antenna are demodulated at the demodulators (280, 282) with the same carrier used at the transmitter, and  $I_R[n]$  and  $Q_R[n]$  are generated after passing through the low-pas filters  
20 (260, 262). Then, the spreading demodulator (240) generates the signals ( $x_R[n]$ ,  $y_R[n]$ ) with two PN sequences ( $C_1[n]$ ,  $C_2[n]$ ).

In order to pick up the desired channels, i.e., DCCH, FCH, SCH#1, SCH#2, among the received code division multiplexed signals ( $x_R[n]$ ,  $y_R[n]$ ), the signals are multiplied by the same orthogonal code  $W_{xxCH}[n]$  (where,  $xxCH = DCCH$  or  $FCH$ ) or  $W_{yyCH}[n]$  (where,  $yyCH = SCH1$  or  $SCH2$ ) used at the transmitter, at the de-spreaders (224, 226, 225, 227). Now, the signals are integrated during the symbol period ( $T_{2x}$  or  $T_{2y}$ ) proportional to the data rate of the corresponding channel. Since the signals at the receiver are distorted,  $PiCH$  is used to correct the distorted signal phase. Therefore, the signals ( $x_R[n]$ ,  $y_R[n]$ ) are multiplied by the corresponding orthogonal code  $W_{PiCH}[n]$ , and are integrated during the period of  $T_1$  at the integrators (210, 212).

When the  $PiCH$  includes additional information such as a control command to control the transmitting power at the receiver, besides the pilot signals for the phase correction, the additional information is extracted by the demultiplexer, and the phase is estimate and corrected using the part of the pilot signals with the known



phase. However, it is assumed that the PiCH does not include any additional information for simplicity. The phase corrections are performed at the second (kind) complex-domain multipliers (242, 246) using  
 5 the estimated phase information through the integrators (210, 212). After selecting the output port according to the desired channel (DCCH, FCH, SCH1, or SCH2) at the second complex-domain multipliers (242, 246), the receiver recovers the  
 10 transmitted data through the de-interleaver and/or the channel decoder (not shown in FIG. 2).

The first (143) and the second complex-domain multiplier (243 or 246) execute the following function.

15                   【EQUATION 12】

Operations for the first complex-domain multipliers (143, 145):

$$O_I[n] + jO_Q[n] = (x_I[n] + jx_Q[n])(y_I[n] + jy_Q[n])$$

$$O_I[n] = x_I[n]y_I[n] - x_Q[n]y_Q[n]$$

$$O_Q[n] = x_I[n]y_Q[n] + x_Q[n]y_I[n]$$

Operations for the second complex-domain multipliers  
 20 (242, 243, 245, 246):



$$O_I[n] + jO_Q[n] = (x_I[n] + jx_Q[n])(y_I[n] - jy_Q[n])$$

$$O_I[n] = x_I[n]y_I[n] + x_Q[n]y_Q[n]$$

$$O_Q[n] = -x_I[n]y_Q[n] + x_Q[n]y_I[n]$$

FIG. 7a and FIG. 7b show signal constellation diagrams. In FIG. 7a, a square represents the input  $(x_I[n] + jx_Q[n])$  of the first complex-domain multiplier, and a circle shows a normalized output  $(O_I[n] + jO_Q[n])$  of the first complex-domain multiplier. FIG. 7b shows four transitions  $(0, +\pi/2, -\pi/2, \pi)$  of the first complex-domain multiplier input  $(x_I[n] + jx_Q[n])$  according to the time flow. The PAR characteristic becomes worse at the origin crossing transition (or  $\pi$ -transition) in FIG. 7b.

FIG. 3a shows the schematic diagram for a conventional spreading modulator. This spreading modulation method is used in the forward link (from a base station to its mobile station) for a CDMA system of IS-95 method. This spreading modulation is called the QPSK (Quadrature Phase Shift Keying) spreading modulation.

【EQUATION 13】

$$I_T[n] = x_T[n] C_{\text{scramble}, I}[n]$$

$$Q_T[n] = y_T[n] C_{\text{scramble}, Q}[n]$$

The outputs ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) of the secondary scrambling code generator shown in FIG. 4a are given by EQUATION 14. In other words, the  
 5 secondary scrambling codes are the same as the primary scrambling codes.

【EQUATION 14】

$$C_{\text{scramble}, I}[n] = C_1[n]$$

$$C_{\text{scramble}, Q}[n] = C_2[n]$$

10 In the IS-95 system,  $x_T[n] = y_T[n]$ , but generally  $x_T[n] \neq y_T[n]$  in the QPSK spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the normalization, the possible transitions of the signal constellation point occurring in the QPSK spreading modulation are  
 15 shown in EQUATION 15. The probability for  $\{0, +\pi/2, -\pi/2, \pi\}$  transition is equally  $1/4$  for each transition.

【EQUATION 15】

$$\arg\left(\frac{I_T[n+1] + jQ_T[n+1]}{I_T[n] + jQ_T[n]}\right) \in \left\{0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi\right\}$$

FIG. 8a shows the transitions of the signal constellation point for the QPSK spreading modulation when  $I_T[n] = \pm 1$ ,  $Q_T[n] = \pm 1$ , and  $SF=4$ .  
 5 For  $n \equiv 0 \bmod SF$ ,  $(I_T[n], Q_T[n])$  becomes one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of  $1/4$ . The transition is assumed to start at  $(+1, +1)$ . There is no change in the signal constellation diagram at a chip time of  $n+1/2$ . At a  
 10 chip time of  $n+1$ ,  $(I_T[n], Q_T[n])$  transits to one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of  $1/4$ . FIG. 8a shows the case of  $(+1, -1)$  transition.

There is no change in the signal constellation  
 15 diagram at a chip time of  $n+3/2$ . At a chip time of  $n+2$ ,  $(I_T[n], Q_T[n])$  transits to one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of  $1/4$ . FIG. 8a shows the case of  $(-1, +1)$  transition. The PAR characteristic becomes worse in this case  
 20 due to an origin crossing transition ( $\pi$ -transition).

There is no change in the signal constellation diagram at a chip time of  $n+5/2$ . At a chip time of  $n+3$ ,  $(I_T[n], Q_T[n])$  transits to one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of 1/4. FIG. 8a shows the case of  $(-1, -1)$  transition.

There is no change in the signal constellation diagram at a chip time of  $n+7/2$ . At a chip time of  $n+4$ ,  $(I_T[n], Q_T[n])$  transits to one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of 1/4. The above transition process is repeated according to the probability.

FIG. 3b shows a schematic diagram for another conventional spreading modulator. This spreading modulation method is used in the reverse link (from a mobile station to its base station) for the IS-95 CDMA system. This spreading modulation is called the OQPSK (Offset QPSK) spreading modulation, and the output signals are governed by EQUATION 16.

【EQUATION 16】

$$I_T[n] = x_T[n] C_{scramble, I}[n]$$

$$Q_T[n] = y_T\left[n - \frac{1}{2}\right] C_{scramble, Q}\left[n - \frac{1}{2}\right]$$



The outputs ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) of the secondary scrambling code generator in FIG. 4a are given by EQUATION 17. In other words, the secondary scrambling codes are the same as the primary scrambling codes, as in the previous QPSK spreading modulation.

[[EQUATION 17]]

$$C_{\text{scramble}, I}[n] = C_1[n]$$

$$C_{\text{scramble}, Q}[n] = C_2[n]$$

10 Generally  $x_T[n] \neq y_T[n]$  in OQPSK spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the normalization, the possible transitions of the signal constellation point occurring in the QPSK spreading modulation are shown in EQUATION 18. The  
15 probabilities for  $\{0, +\pi/2, -\pi/2, \pi\}$  transitions are  $1/2, 1/4, 1/4, 0$ , respectively.

[[EQUATION 18]]

$$\arg\left(\frac{I_T[n+1/2] + jQ_T[n+1/2]}{I_T[n] + jQ_T[n]}\right) \in \left\{0, +\frac{\pi}{2}, -\frac{\pi}{2}\right\}$$

$$\arg\left(\frac{I_T[n+1] + jQ_T[n+1]}{I_T[n+1/2] + jQ_T[n+1/2]}\right) \in \left\{0, +\frac{\pi}{2}, -\frac{\pi}{2}\right\}$$

In OQPSK spreading modulation shown in FIG. 3b,  
20 the signal of the orthogonal phase channel (Q-

channel) is delayed by a half chip ( $T_c/2$ ) relative to the signal of the in-phase channel (I-channel) in order to improve the PAR characteristic of QPSK spreading modulation in FIG. 3a. Due to a half chip  
5 ( $T_c/2$ ) delay, the codes of the I-channel and Q-channel signals cannot be changed simultaneously. Thus, the  $\pi$ -transition crossing the origin is prohibited, and the PAR characteristic is improved.

FIG. 8b shows the transitions of the signal  
10 constellation point for the OQPSK spreading modulation when  $I_T[n] = \pm 1$ ,  $Q_T[n] = \pm 1$ , and  $SF=4$ . For  $n \equiv 0 \bmod SF$ ,  $(I_T[n], Q_T[n])$  becomes one of  $(+1, +1)$ ,  $(+1, -1)$ ,  $(-1, -1)$ ,  $(-1, +1)$  with an equal probability of  $1/4$ . The transition is assumed to  
15 start at  $(+1, +1)$ . At a chip time of  $n+1/2$ ,  $(I_T[n], Q_T[n])$  transits to either  $(+1, +1)$  or  $(+1, -1)$  with an equal probability of  $1/2$ . FIG. 8b shows the case of  $(+1, +1)$  transition: At a chip time of  $n+1$ ,  $(I_T[n], Q_T[n])$  transits to either  $(+1, +1)$  or  $(-1, +1)$  with an equal probability of  $1/2$ . FIG. 8b shows  
20 the case of  $(+1, +1)$  transition: At a chip time of  $n+3/2$ ,  $(I_T[n], Q_T[n])$  transits to either  $(+1, +1)$  or



(+1, -1) with an equal probability of 1/2. FIG. 8b shows the case of (+1, -1) transition: At a chip time of  $n+2$ ,  $(I_T[n], Q_T[n])$  transits to either (+1, -1) or (-1, -1) with an equal probability of 1/2.

5 FIG. 8b shows the case of (-1, -1) transition: At a chip time of  $n+5/2$ ,  $(I_T[n], Q_T[n])$  transits to either (-1, -1) or (-1, +1) with an equal probability of 1/2. FIG. 8b shows the case of (-1, +1) transition: At a chip time of  $n+3$ ,  $(I_T[n],$   
10  $Q_T[n])$  transits to either (+1, +1) or (-1, +1) with an equal probability of 1/2. FIG. 8b shows the case of (-1, +1) transition: At a chip time of  $n+7/2$ ,  $(I_T[n], Q_T[n])$  transits to either (-1, +1) or (-1, -1) with an equal probability of 1/2. FIG. 8b shows  
15 the case of (-1, -1) transition: At a chip time of  $n+4$ ,  $(I_T[n], Q_T[n])$  transits to either (+1, -1) or (-1, -1) with an equal probability of 1/2. The above transition process is repeated according to the probability.

20 FIG. 3c shows a schematic diagram for another conventional spreading modulator. This spreading modulation method is subdivided into three methods

according to the scrambling code generator (150). The first method is used in the forward link (from a base station to its mobile station) for a W-CDMA (Wideband CDMA) system as another candidate for  
 5 cdma2000 or IMT-2000 system. This spreading modulation is called the CQPSK (Complex QPSK) spreading modulation, and the output signals are governed by EQUATION 19.

【EQUATION 19】

$$I_T[n] + jQ_T[n] = (x_T[n] + jy_T[n]) \left\{ \frac{1}{\sqrt{2}} (C_{scramble, I}[n] + jC_{scramble, Q}[n]) \right\}$$

$$I_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, I}[n] - \frac{1}{\sqrt{2}} y_T[n] C_{scramble, Q}[n]$$

$$Q_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, Q}[n] + \frac{1}{\sqrt{2}} y_T[n] C_{scramble, I}[n]$$

10

The outputs ( $C_{scramble, I}[n]$ ,  $C_{scramble, Q}[n]$ ) of the secondary scrambling code generator in FIG. 4a are given by EQUATION 20. In other words, the secondary scrambling codes are the same as the primary  
 15 scrambling codes, as described in the previous QPSK and OQPSK spreading modulation.

【EQUATION 20】

$$C_{scramble, I}[n] = C_1[n]$$

$$C_{scramble, Q}[n] = C_2[n]$$



Generally  $x_T[n] \neq y_T[n]$  in CQPSK spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the normalization, the possible transitions of the signal constellation point occurring in the CQPSK spreading modulation are shown in EQUATION 21. The probability for  $\{0, +\pi/2, -\pi/2, \pi\}$  transition is equally 1/4 for each transition.

[[EQUATION 21]]

$$\arg\left\{\frac{I_T[n+1] + jQ_T[n+1]}{I_T[n] + jQ_T[n]}\right\} \in \left\{0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi\right\}$$

10 The previous OQPSK method is effective when the I-channel and Q-channel powers are the same as in IS-95 reverse link channels. But the Q-channel signal should be delayed by a half chip, and the amplitude of the transmitting power for I-channel is different from that for Q-channel in the case of FIG. 1 when several channels with different transmitting powers are using orthogonal channels. The linear range of the amplifier should be selected based upon the largest transmitting signal power in order to reduce the neighboring channel interference from the signal distortion and the inter-modulation.

15

20

On the other hand, in CQPSK spreading modulation, I-channel signal ( $x_T[n]$ ) and Q-channel signal ( $y_T[n]$ ) are multiplied in complex-domain by the secondary scrambling codes,  $C_{\text{scramble},I}[n]$  and  $C_{\text{scramble},Q}[n]$  of the same amplitude. Therefore, the smaller of signal power level of the two (I and Q) become large, and the larger of signal power level of the two becomes small; the two signal power levels are equalized statistically. The CQPSK spreading modulation is more effective to improve the PAR characteristic when there are multiple channels with different power levels. In the CQPSK spreading modulation,  $x_T[n] + jy_T[n]$  makes an origin crossing transition ( $\pi$ -transition) with a probability of 1/4.

FIG. 8c shows the transitions of the signal constellation point for the CQPSK spreading modulation when  $x_T[n] = \pm 1$ ,  $y_T[n] = \pm 1$ ,  $I_T[n] = \pm 1$ ,  $Q_T[n] = \pm 1$ , and  $SF=4$ . For  $n \equiv 0 \bmod SF$ ,  $x_T[n] + jy_T[n]$  and  $C_{\text{scramble},I}[n] + jC_{\text{scramble},Q}[n]$  become one of  $1+j$ ,  $1-j$ ,  $-1-j$ ,  $-1+j$  with an equal probability of 1/4, and it is assumed that  $x_T[n] + jy_T[n] = 1+j$  and

$C_{\text{scramble},I}[n] + jC_{\text{scramble},Q}[n] = 1 + j$  ; in other words, in this case,  $I_T[n] + jQ_T[n] = 0 + j\sqrt{2}$  . And this equation becomes  $I_T[n] + jQ_T[n] = 0 + j1$  due to the normalization. There is no change in the signal constellation diagram at a chip time of  $n+1/2$ . At a chip time of  $n+1$ ,  $x_T[n] + jy_T[n]$  transits to one of  $1+j$ ,  $1-j$ ,  $-1-j$ , and  $-1+j$ , and  $C_{\text{scramble},I}[n] + jC_{\text{scramble},Q}[n]$  also transits to one of  $1+j$ ,  $1-j$ ,  $-1-j$ , and  $-1+j$ .

The second method is used in the reverse link (from a mobile station to its base station) for a G-CDMA (Global-CDMA) I and II systems as another candidate for IMT-2000 system proposed at International Telecommunications Union (ITU, <http://www.itu.int>) in June 1998. This spreading modulation is called the OCQPSK (Orthogonal Complex QPSK) spreading modulation referring to Korean Patent NO. 10-269593-0000. The following relations hold when only an even number is assigned to the subscript of the orthogonal Walsh code for each channel.

【EQUATION 22】

$$x_T[2n] \approx x_T[2n+1]$$

$$y_T[2n] \approx y_T[2n+1]$$

$$I_T[n] + jQ_T[n] = (x_T[n] + jy_T[n]) \left\{ \frac{1}{\sqrt{2}} (C_{scramble, I}[n] + jC_{scramble, Q}[n]) \right\}$$

$$I_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, I}[n] - \frac{1}{\sqrt{2}} y_T[n] C_{scramble, Q}[n]$$

$$Q_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, Q}[n] + \frac{1}{\sqrt{2}} y_T[n] C_{scramble, I}[n]$$

The outputs ( $C_{scramble, I}[n]$ ,  $C_{scramble, Q}[n]$ ) of the secondary scrambling code generator in FIG. 4b are given by EQUATION 23. Since  $W_0^{(p)}[n]=1$ , the secondary scrambling code generators in FIG. 4b and FIG. 4c are the same for  $k = 0$ .

【EQUATION 23】

$$C_{scramble, I}[n] + jC_{scramble, Q}[n] = C_1[n] (W_{2k}^{(p)}[n] + jW_{2k+1}^{(p)}[n])$$

$$C_{scramble, I}[n] = C_1[n] W_{2k}^{(p)}[n]$$

$$C_{scramble, Q}[n] = C_1[n] W_{2k+1}^{(p)}[n]$$

Where  $p$  is a power of 2 (i.e.,  $p = 2^n$ ), and

$$k \in \{0, 1, 2, \dots, \frac{p}{2} - 1\}$$

10

Generally  $x_T[n] \neq y_T[n]$  in OCQPSK spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the normalization, the possible transitions of the

signal constellation point occurring in the OCQPSK spreading modulation are shown in EQUATION 24. The probabilities for  $\{0, +\pi/2, -\pi/2, \pi\}$  transitions are 0, 1/2, 1/2, and 0 for  $n=2t+1$  (odd number), and  
 5 1/4, 1/4, 1/4, and 1/4 in case of  $n=2t$  (even number) for each transition, respectively.

【EQUATION 24】

$$\begin{aligned}
 & \frac{I_T[n+1] + jQ_T[n+1]}{I_T[n] + jQ_T[n]} \\
 &= \frac{(x_T[n+1] + jy_T[n+1])(C_{scramble,I}[n+1] + jC_{scramble,Q}[n+1])}{(x_T[n] + jy_T[n])(C_{scramble,I}[n] + jC_{scramble,Q}[n])} \\
 &= \frac{x_T[n+1] + jy_T[n+1]}{x_T[n] + jy_T[n]} \cdot \frac{C_1[n+1](W_{2k}^{(p)}[n+1] + jW_{2k+1}^{(p)}[n+1])}{C_1[n](W_{2k}^{(p)}[n] + jW_{2k+1}^{(p)}[n])} \\
 & \arg \left\{ \frac{I_T[2t+1] + jQ_T[2t+1]}{I_T[2t] + jQ_T[2t]} \right\} \in \left\{ +\frac{\pi}{2}, -\frac{\pi}{2} \right\} \\
 & \arg \left\{ \frac{I_T[2t+2] + jQ_T[2t+2]}{I_T[2t+1] + jQ_T[2t+1]} \right\} \in \left\{ 0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi \right\}
 \end{aligned}$$

10 In the OCQPSK spreading modulation, the following properties are used:

$$\begin{aligned}
 & \text{For } W_{2k}^{(p)}[n], \quad k \in \{0, 1, 2, \dots, \frac{P}{2} - 1\} ; \quad W_{2k}^{(p)}[2t] = W_{2k}^{(p)}[2t+1], \\
 & t \in \{0, 1, 2, \dots\} .
 \end{aligned}$$

$$\begin{aligned}
 & \text{And for } W_{2k+1}^{(p)}[n], \quad k \in \{0, 1, 2, \dots, \frac{P}{2} - 1\} ; \quad W_{2k+1}^{(p)}[2t] = -
 \end{aligned}$$

$$W_{2k+1}^{(P)}[2t+1], \quad t \in \{0, 1, 2, \dots\}.$$

The orthogonal Walsh codes with even number subscripts are used for the channel identification except for the case when the orthogonal Walsh codes with odd number subscripts must be used for the channel identification due to the high transmitting data rate. Because  $x_T[2t] = x_T[2t+1]$ ,  $y_T[2t] = y_T[2t+1]$ ,  $t \in \{0, 1, 2, \dots\}$ , the following approximation holds as described in EQUATION 25.

10                   【EQUATION 25】

$$x_T[n] + jy_T[n] \approx G_{S2} W_{SCH2}[n] D_{SCH2} \left[ \left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor \right] + jG_{S1} W_{SCH1}[n] D_{SCH1} \left[ \left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor \right]$$

In the OCQPSK spreading modulation, avoiding the origin crossing transition ( $\pi$ -transition) which makes worse the PAR characteristic for  $n=2t+1$ , the PAR characteristic of the spreading signals is improved compared to the CQPSK spreading modulation. At  $n=2t$ ,  $x_T[n] + jy_T[n]$  makes an origin crossing transition ( $\pi$ -transition) with a probability of 1/4 as in the CQPSK spreading modulation, while, at  $n=2t+1$ , the corresponding probability is zero. Therefore, the average probability for the origin

crossing transition ( $\pi$ -transition) decreases to 1/8 from 1/4.  $C_1[n]$  for the scrambling in FIG. 4b is also used in identifying the transmitter.

The third method is used in the reverse link (from a mobile station to its base station) for a W-CDMA system as another candidate for cdma2000 and IMT-2000 system. This spreading modulation is POCQPSK (Permuted Orthogonal Complex QPSK) spreading modulation referring to Korean Patent NO. 10-269593-0000. The following relations hold when only an even number is assigned to the subscript of the orthogonal Walsh code for each channel.

【EQUATION 26】

$$x_T[2n] \approx x_T[2n+1]$$

$$y_T[2n] \approx y_T[2n+1]$$

$$I_T[n] + jQ_T[n] = (x_T[n] + jy_T[n]) \left\{ \frac{1}{\sqrt{2}} (C_{scramble, I}[n] + jC_{scramble, Q}[n]) \right\}$$

$$I_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, I}[n] - \frac{1}{\sqrt{2}} y_T[n] C_{scramble, Q}[n]$$

$$Q_T[n] = \frac{1}{\sqrt{2}} x_T[n] C_{scramble, Q}[n] + \frac{1}{\sqrt{2}} y_T[n] C_{scramble, I}[n]$$

The outputs ( $C_{scramble, I}[n]$ ,  $C_{scramble, Q}[n]$ ) of the secondary scrambling code generator in FIG. 4d are given by EQUATION 27.

## 【EQUATION 27】

$$C_{scramble,I}[n] + jC_{scramble,Q}[n] = C_1[n] (W_{2k}^{(\rho)}[n] + jC_2[n] W_{2k+1}^{(\rho)}[n])$$

$$C_{scramble,I}[n] = C_1[n] W_{2k}^{(\rho)}[n]$$

$$C_{scramble,Q}[n] = C_1[n] C_2[n] W_{2k+1}^{(\rho)}[n]$$

$$C_2[2t] = C_2[2t+1] = C_2[2t], \quad t \in \{0, 1, 2, \dots\}$$

Generally  $x_T[n] \neq y_T[n]$  in POCQPSK spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the  
 5 normalization, the possible transitions of the signal constellation point occurring in the POCQPSK spreading modulation are shown in EQUATION 28. The probabilities for  $\{0, +\pi/2, -\pi/2, \pi\}$  transition is  
 0, 1/2, 1/2, and 0 for  $n=2t+1$  (odd number), and 1/4,  
 10 1/4, 1/4, and 1/4 in case of  $n=2t$  (even number) for each transition, respectively.

## 【EQUATION 28】





$$\begin{aligned}
 & \frac{I_T[2t+1] + jQ_T[2t+1]}{I_T[2t] + jQ_T[2t]} \\
 = & \frac{x_T[2t+1] + jy_T[2t+1]}{x_T[2t] + jy_T[2t]} \cdot \frac{C_{\text{scramble}, I}[2t+1] + jC_{\text{scramble}, Q}[2t+1]}{C_{\text{scramble}, I}[2t] + jC_{\text{scramble}, Q}[2t]} \\
 = & \frac{C_1[2t+1]}{C_1[2t]} \cdot \frac{W_{2k}^{(p)}[2t+1] + jC_2[2t+1]W_{2k+1}^{(p)}[2t+1]}{W_{2k}^{(p)}[2t] + jC_2[2t]W_{2k+1}^{(p)}[2t]} \\
 = & \frac{C_1[2t+1]}{C_1[2t]} \cdot \frac{1 - jC_2[2t]W_1^{(p)}[2t]}{1 + jC_2[2t]W_1^{(p)}[2t]}
 \end{aligned}$$

$$\arg \left\{ \frac{I_T[2t+1] + jQ_T[2t+1]}{I_T[2t] + jQ_T[2t]} \right\} \in \left\{ +\frac{\pi}{2}, -\frac{\pi}{2} \right\}$$

$$\begin{aligned}
 & \frac{I_T[2t+2] + jQ_T[2t+2]}{I_T[2t+1] + jQ_T[2t+1]} \\
 = & \frac{(x_T[2t+2] + jy_T[2t+2])(C_{\text{scramble}, I}[2t+2] + jC_{\text{scramble}, Q}[2t+2])}{(x_T[2t+1] + jy_T[2t+1])(C_{\text{scramble}, I}[2t+1] + jC_{\text{scramble}, Q}[2t+1])} \\
 = & \frac{x_T[2t+2] + jy_T[2t+2]}{x_T[2t+1] + jy_T[2t+1]} \cdot \frac{W_{2k}^{(p)}[2t+2]}{W_{2k}^{(p)}[2t+1]} \cdot \frac{C_1[2t+2]}{C_1[2t+1]} \cdot \frac{1 + jC_2[2t+2]W_1^{(p)}[2t+2]}{1 + jC_2[2t+1]W_1^{(p)}[2t+1]}
 \end{aligned}$$

$$\arg \left\{ \frac{I_T[2t+2] + jQ_T[2t+2]}{I_T[2t+1] + jQ_T[2t+1]} \right\} \in \left\{ 0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi \right\}$$

The POCQPSK spreading modulation is basically the same as the OCQPSK spreading modulation. Therefore, at  $n=2t$ ,  $x_T[n] + jy_T[n]$  makes an origin crossing transition ( $\pi$ -transition) with a probability of 1/4 as described in the CQPSK spreading modulation, while, at  $n=2t+1$ , the corresponding probability is zero.  $C'_2[n]$  decimated from  $C_2[n]$  is used in order to compensate for the lack of the randomness due to a periodic repetition of the orthogonal Walsh functions. The decimation should be made with the following properties:

For  $t \in \{0, 1, 2, \dots\}$  and  $k \in \{0, 1, 2, \dots, \frac{p}{2} - 1\}$ ,

$$W_{2k+1}^{(p)}[2t] = -W_{2k+1}^{(p)}[2t+1], \text{ and } C'_2[2t] W_{2k+1}^{(p)}[2t] \\ = -C'_2[2t+1] W_{2k+1}^{(p)}[2t+1].$$

Even though  $C_2[n]$  is decimated to 2:1 in the above  
 5 case,  $2^d:1$  decimation for  $d \in \{1, 2, 3, \dots\}$  is also  
 possible. When  $2^d = \max\{SF_{PICH}, SF_{DCCH}, SF_{SCH2}, SF_{SCH1},$   
 $SF_{FCH}\}$ , the randomness of the POCQPSK is the same as  
 that of the OCQPSK, and the randomness becomes high  
 for 2:1 decimation with  $d=1$ .  $C_1[n]$  and  $C_2[n]$  for the  
 10 scrambling to obtain the better spectrum  
 characteristic are also used to identify the  
 transmitter through the auto-correlation and the  
 cross-correlation. The number of identifiable  
 transmitters increases when both of  $C_1[n]$  and  $C_2[n]$   
 15 are used as the scrambling codes.

FIG. 9 and FIG. 10 show schematic diagrams for  
 a transmitter and a receiver using the POCQPSK  
 spreading modulation. FIG. 9 shows a schematic  
 diagram for the transmitter based on the cdma2000  
 20 system, which is one of the candidates for IMT-2000  
 system as a third generation mobile communication

system. The transmitter has five orthogonal channels: PICH, DCCH, FCH, SCH1, and SCH2. Each channel performs the signal conversion process by changing a binary data {0, 1} into {+1, -1}.

5 The gain controlled signal for each channel is spread at the spreader (120, 122, 124, 126, 128) with the orthogonal OVSF code  $W_{PICH}[n]$ ,  $W_{DCCH}[n]$ ,  $W_{SCH2}[n]$ ,  $W_{SCH1}[n]$ , or  $W_{FCH}[n]$ , and is delivered to the adder (130, 132). The spreading modulation takes  
10 place at the Spreading Modulator (140) with the first inputs ( $x_T[n]$ ,  $y_T[n]$ ) and the second inputs (the primary scrambling codes;  $C_1[n]$  and  $C_2[n]$ ), and the outputs ( $I_T[n]$ ,  $Q_T[n]$ ) are generated. The spreading modulator (140) comprises the scrambling  
15 code generator (510) and the first complex-domain multiplier (143). The scrambling code generator (510) produces the secondary scrambling codes ( $C_{scramble, i}[n]$ ,  $C_{scramble, q}[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) as the inputs to  
20 improve the PAR characteristic. The first complex-domain multiplier (143) takes  $x_T[n]$  and  $y_T[n]$  as inputs and the secondary scrambling codes ( $C_{scramble,$

$r[n]$ ,  $C_{\text{scramble}, q}[n]$ ) as another inputs.

The primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) in the cdma2000 system is produced by the primary scrambling code generator (550) using three PN sequences ( $PN_I[n]$ ,  $PN_Q[n]$ ,  $PN_{\text{long}}[n]$ ) as shown in FIG. 5a with the following equation:

【EQUATION 29】

$$C_1[n] = PN_I[n] PN_{\text{long}}[n]$$

$$C_2[n] = PN_Q[n] PN_{\text{long}}[n-1]$$

The secondary scrambling codes ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) are given by the following equation:

【EQUATION 30】

$$C_{\text{scramble}, I}[n] = C_1[n] W_0^{(p)}[n] = C_1[n]$$

$$C_{\text{scramble}, Q}[n] = C_1[n] C_2[n] W_1^{(p)}[n]$$

$$C_2[2t] = C_2[2t+1] = C_2[2t], \quad t \in \{0, 1, 2, \dots\}$$

The outputs ( $I_T[n]$ ,  $Q_T[n]$ ) of the Spreading Modulator (140) pass through the low-pass filters (160, 162) and power amplifiers (170, 172). Then the amplified outputs are delivered to the modulators (180, 182) which modulate the signals into the desired frequency band using a carrier. And the

modulated signals are added by the adder (190), and delivered to an antenna.

FIG. 10 shows a schematic diagram for a receiver according to the transmitter of FIG. 9. The received signals through an antenna are demodulated at the demodulators (280, 282) with the same carrier used at the transmitter, and  $I_R[n]$  and  $Q_R[n]$  are generated after the signals pass through the low-pass filters (260, 262). Then, the spreading demodulator (240) produces the signals ( $x_R[n]$ ,  $y_R[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ). The spreading demodulator (240) comprises the scrambling code generator (510) and the second complex-domain multiplier (243). The scrambling code generator (510) produces the secondary scrambling codes ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) as the inputs to improve the PAR characteristic. The second complex-domain multiplier (243) in the spreading demodulator (240) takes the  $I_R[n]$ ,  $Q_R[n]$  as the first inputs and the secondary scrambling codes ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) as the second inputs. The first and

secondary scrambling codes are generated by the same method as in the transmitter.

In order to select the desired channels among the outputs  $(x_R[n], y_R[n])$  of the spreading demodulator (240), the signals are multiplied by the same orthogonal code  $W_{xxCH}[n]$  (where,  $xxCH = DCCH$  or  $FCH$ ) or  $W_{yyCH}[n]$  (where,  $yyCH = SCH1$  or  $SCH2$ ) used at the transmitter, at the despreaders (224, 226, 225, 227). Then, the signals are integrated during the symbol period  $T_{2x}$  or  $T_{2y}$ . Since the signals at the receiver are distorted,  $PiCH$  is used to correct the distorted signal phase. Therefore, the signals  $(x_R[n], y_R[n])$  are multiplied by the corresponding orthogonal code  $W_{PiCH}[n]$ , and are integrated during the period of  $T_1$  at the integrators (210, 212).

The reverse link  $PiCH$  in the cdma2000 system may include additional information such as a control command to control the transmitting power at the receiver, besides the pilot signals for the phase correction. In this case, the additional information is extracted by the de-multiplexer, and the phase is estimated using the part of the pilot signals having

the known phase. The phase corrections are performed at the second (kind) complex-domain multipliers (242, 246) shown in the left of FIG. 10 using the estimated phase information through the integrators  
5 (210, 212).

However, the conventional CDMA systems have two problems: The first problem is that the strict condition for the linearity of the power amplifier is required. The second problem is when there are  
10 several transmitting channels, the signal distortion and the neighboring frequency interference should be reduced. Therefore, the expensive power amplifiers with the better linear characteristic are required.

## 15 DISCLOSURE OF THE INVENTION

The object of this invention is to provide a method and an apparatus for the spreading modulation method in CDMA spread spectrum communication systems  
20 to solve the above mentioned problems. In the spreading modulation method according to this invention, the probability for the spread signals

( $x_T[n] + jy_T[n]$ ) to make the origin crossing transition ( $\pi$ -transition) becomes zero not only at  $n=2t+1$ ,  $t \in \{0, 1, 2, \dots\}$  as in cases of the OCQPSK and POCQPSK spreading modulation but also at  $n=2t$  only except for the time  $n \equiv 0 \pmod{\min\{SF_{PICH}, SF_{DCCH}, SF_{SCH2}, SF_{SCH1}, SF_{FCH}\}}$  when the spread transmitting data vary. Therefore, the PAR characteristic is improved by using the proposed spreading modulation scheme. In other words, this invention provides a method and an apparatus for the spreading modulation method with improved PAR characteristic in CDMA spread spectrum communication systems.

In accordance with an aspect of this invention an apparatus and a method for spreading modulation are invented in CDMA systems with a transmitter and receivers.

The transmitter according to the proposed invention has several channels with different information. Each channel spreads with the orthogonal codes using a complex-domain multiplier in addition to the conventional spreaders, and the spread signals are added. Then the signals are



scrambled with the PN sequences, are modulated with a carrier, and are delivered to an antenna.

The receiver according to the invention demodulates the received signals with the same carrier used in the transmitter. The demodulated mixed signals are de-scrambled with the same synchronized PN sequences, and the de-scrambled signals are de-spread with the same synchronized orthogonal codes using a complex-domain multiplier in addition to the conventional de-spreaders. Then the desired information is recovered at the receiver with the conventional signal processing.

In a preferred embodiment, the transmitter according to the invention has an additional complex-domain multiplier and a special scrambling code generator. The probability for the spread signals  $(x_T[n] + jy_T[n])$  to make the origin crossing transition ( $\pi$ -transition) becomes zero not only for  $n=2t+1$ ,  $t \in \{0, 1, 2, \dots\}$  but also for  $n=2t$  only except for the time  $n \equiv 0 \pmod{\min\{SF_{PICH}, SF_{DCCH}, SF_{SCH2}, SF_{SCH1}, SF_{FCH}\}}$  when the spread transmitting data vary.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Exemplary embodiments of the present invention will be described in conjunction with the drawings  
5 in which:

FIG. 1 shows a schematic diagram for a conventional CDMA transmitter with orthogonal multiple channels;

FIG. 2 shows a schematic diagram for a receiver  
10 according to the transmitter of FIG. 1;

FIG. 3a shows a schematic diagram for a conventional QPSK spreading modulator;

FIG. 3b shows a schematic diagram for a conventional OQPSK spreading modulator;

15 FIG. 3c shows a schematic diagram for a conventional CQPSK, OCQPSK, POCQPSK spreading modulator and for a spreading modulator according to the present invention;

FIG. 3d shows another schematic diagram for a  
20 conventional OCQPSK, POCQPSK spreading modulator;

FIG. 4a shows a schematic diagram for the scrambling code generator in the QPSK, OQPSK, CQPSK

spreading modulation;

FIG. 4b shows a schematic diagram for the scrambling code generator in the OCQPSK spreading modulation;

5 FIG. 4c shows another schematic diagram for the scrambling code generator in the OCQPSK spreading modulation;

FIG. 4d shows a schematic diagram for the scrambling code generator in the POCQPSK spreading  
10 modulation;

FIG. 5a shows schematic diagrams for the first and secondary scrambling code generators in the cdma2000 modulation;

FIG. 5b shows a general diagram for the  
15 secondary scrambling code generator in FIG. 5a;

FIG. 6a shows a schematic diagram for a conventional CQPSK, OCQPSK, POCQPSK spreading demodulator and for a spreading demodulator according to the present invention;

20 FIG. 6b shows a schematic diagram for a conventional OCQPSK, POCQPSK spreading demodulator;

FIG. 7a shows a signal constellation diagram

and transitions;

FIG. 7b shows four possible transitions of a signal constellation point;

FIG. 8a shows the transitions of a signal constellation point for the QPSK spreading modulation;

FIG. 8b shows the transitions of a signal constellation point for the OQPSK spreading modulation;

FIG. 8c shows the transitions of a signal constellation point for the CQPSK spreading modulation;

FIG. 9 shows a schematic diagram for a cdma2000 transmitter;

FIG. 10 shows a schematic diagram for a cdma2000 receiver according to the transmitter of FIG. 9;

FIG. 11a shows a schematic diagram for a transmitter according to the present invention;

FIG. 11b shows a schematic diagram for the scrambling code generator in the DCQPSK spreading modulation according to the present invention; and

FIG. 12 shows a schematic diagram for a receiver according to the transmitter of FIG. 11a.

<Explanations for main symbols in the drawings>

5 110, 112, 114, 116, 118: gain controller  
120, 122, 124, 126, 128: spreader  
130, 132: adder  
140, 141: spreading modulator  
143, 145: first (kind) complex(-domain) multiplier  
10 150, 151: scrambling code generator  
160, 162: low-pass filter (LPF)  
170, 172: power amplifier  
180, 182: modulator  
190: adder  
15 210, 212, 214, 215, 216, 217: integrator  
220, 222, 224, 226, 225, 227: de-spreader  
240, 241: spreading demodulator  
242, 243, 245, 246: second (kind) complex(-domain)  
multiplier  
20 260, 262: low-pass filter  
280, 282: demodulator  
510, 520, 530, 550: scrambling code generator

1220, 1222, 1224, 1226: de-spreader

#### BEST MODE FOR CARRYING OUT THE INVENTION

5           The present invention will be better understood with regard to the following description, appended claims, and accompanying figures. In this application, similar reference numbers are used for components similar to the prior art and the modified  
10 or added components in comparison with the prior art are described for the present invention in detail.

FIG. 11 and FIG. 12 show schematic diagram for a transmitter and a receiver according to the present invention, respectively. The transmitter in  
15 FIG. 11a and the receiver in FIG. 12 are modified from the transmitter and the receiver with the POCQPSK spreading modulation shown in FIG. 9 and FIG. 10. The transmitter according to the invention has 5 orthogonal channels: PiCH, DCCH, FCH, SCH1, and SCH2.  
20           Unlike the previous transmitter as in FIG. 9, the transmitter according to the invention has an additional complex-domain multiplier (145) shown in

the left of FIG. 11a. The complex-domain multiplier

(145) takes the transmitting data  $(D_{SCH1}[\lfloor \frac{n}{SF_{SCH1}} \rfloor],$

$D_{SCH2}[\lfloor \frac{n}{SF_{SCH2}} \rfloor])$  of SCH1 and SCH2 of statistically high

transmitting power as the first inputs and takes the

5 orthogonal OVFSF codes  $(H_{SCH1}[n], H_{SCH2}[n])$  as the

second inputs. And the first orthogonal complex-

domain spreading occurs at the complex-domain

multiplier (145). Other gain-controlled signals for

PiCH, DCCH and FCH spread at the spreaders (1120,

10 1122, 1128) with orthogonal OVFSF codes  $(H_{PiCH}[n],$

$H_{DCCH}[n], H_{FCH}[n])$ , and are delivered to the adders

(130, 132) with the outputs  $(S_I[n], S_Q[n])$  of the

complex-domain multiplier (145). The outputs  $(x_T[n],$

$y_T[n])$  of the adder (130, 132) are given in EQUATION

15 31.

【EQUATION 31】

$$\begin{aligned}
& x_T[n] \\
&= G_P H_{PCH}[n] D_{PCH}\left[\left\lfloor \frac{n}{SF_{PCH}} \right\rfloor\right] + G_D H_{DCCH}[n] D_{DCCH}\left[\left\lfloor \frac{n}{SF_{DCCH}} \right\rfloor\right] \\
&\quad + \frac{1}{\sqrt{2}} G_{S1} H_{SCH1}[n] D_{SCH1}\left[\left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor\right] - \frac{1}{\sqrt{2}} G_{S2} H_{SCH2}[n] D_{SCH2}\left[\left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor\right] \\
&\approx \frac{1}{\sqrt{2}} G_{S1} H_{SCH1}[n] D_{SCH1}\left[\left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor\right] - \frac{1}{\sqrt{2}} G_{S2} H_{SCH2}[n] D_{SCH2}\left[\left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor\right] \\
& y_T[n] \\
&= G_F H_{FCH}[n] D_{FCH}\left[\left\lfloor \frac{n}{SF_{FCH}} \right\rfloor\right] \\
&\quad + \frac{1}{\sqrt{2}} G_{S2} H_{SCH1}[n] D_{SCH2}\left[\left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor\right] + \frac{1}{\sqrt{2}} G_{S1} H_{SCH2}[n] D_{SCH1}\left[\left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor\right] \\
&\approx \frac{1}{\sqrt{2}} G_{S2} H_{SCH1}[n] D_{SCH2}\left[\left\lfloor \frac{n}{SF_{SCH2}} \right\rfloor\right] + \frac{1}{\sqrt{2}} G_{S1} H_{SCH2}[n] D_{SCH1}\left[\left\lfloor \frac{n}{SF_{SCH1}} \right\rfloor\right]
\end{aligned}$$

The spreading modulation takes place at the Spreading Modulator (141) with the first inputs ( $x_T[n]$ ,  $y_T[n]$ ) and the second inputs (the primary scrambling codes;  $C_1[n]$  and  $C_2[n]$ ), and the outputs ( $I_T[n]$ ,  $Q_T[n]$ ) are generated. The spreading modulator (141) comprises the scrambling code generator (530) and the complex-domain multiplier (143). The scrambling code generator (530) according to the present invention shown in FIG. 11b generates the secondary scrambling codes ( $C_{scramble, i}[n]$ ,  $C_{scramble, q}[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) as the inputs to improve the PAR characteristic. The complex-domain multiplier (143) takes the  $x_T[n]$ ,  $y_T[n]$  as inputs and the secondary



scrambling codes ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) as another inputs. The primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) in the cdma2000 system are generated by the primary scrambling code generator (550) using three  
 5 PN sequences ( $PN_I[n]$ ,  $PN_Q[n]$ ,  $PN_{\text{long}}[n]$ ) as shown in FIG. 5a with the following equation:

【EQUATION 32】

$$C_1[n] = PN_I[n] PN_{\text{long}}[n]$$

$$C_2[n] = PN_Q[n] PN_{\text{long}}[n-1]$$

The secondary scrambling codes ( $C_{\text{scramble}, I}[n]$ ,  $C_{\text{scramble}, Q}[n]$ ) shown in FIG. 11b are given by the  
 10 following equations.

(1) For  $n \equiv 0 \pmod{\min\{SF_{\text{PICH}}, SF_{\text{DCCH}}, SF_{\text{SCH2}}, SF_{\text{SCH1}}, SF_{\text{FCH}}\}}$

【EQUATION 33】

$$C_{\text{scramble}, I}[n] = C_1[n]$$

$$C_{\text{scramble}, Q}[n] = C_2[n]$$

$$\arg \left\{ \frac{I_T[n] + jQ_T[n]}{I_T[n-1] + jQ_T[n-1]} \right\} \in \left\{ 0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi \right\}$$

15

(2) For  $n \not\equiv 0 \pmod{\min\{SF_{\text{PICH}}, SF_{\text{DCCH}}, SF_{\text{SCH2}}, SF_{\text{SCH1}}, SF_{\text{FCH}}\}}$

## 【EQUATION 34】

$$\begin{aligned}
& C_{\text{scramble},I}[n] + jC_{\text{scramble},Q}[n] \\
& = jC_2[n] \{ C_{\text{scramble},I}[n-1]H_{\text{SCH1}}[n-1]H_{\text{SCH1}}[n] \\
& \quad + jC_{\text{scramble},Q}[n-1]H_{\text{SCH2}}[n-1]H_{\text{SCH2}}[n] \} \\
& C_{\text{scramble},I}[n] = -C_2[n]C_{\text{scramble},Q}[n-1]H_{\text{SCH2}}[n-1]H_{\text{SCH2}}[n] \\
& C_{\text{scramble},Q}[n] = C_2[n]C_{\text{scramble},I}[n-1]H_{\text{SCH1}}[n-1]H_{\text{SCH1}}[n]
\end{aligned}$$

The spreading modulation according to the present invention is called the DCQPSK (Double  
5 Complex QPSK) spreading modulation. For  $|I_T[n]| = |Q_T[n]| = 1$  based on the normalization, the possible transitions of the signal constellation point occurring in the DCQPSK spreading modulation are shown in EQUATION 35 and EQUATION 36. The  
10 probabilities for  $\{0, +\pi/2, -\pi/2, \pi\}$  transitions are  $1/4, 1/4, 1/4$ , and  $1/4$  for  $n \equiv 0 \bmod SF_{\min}$ , and  $0, 1/2, 1/2$ , and  $0$  when  $n \not\equiv 0 \bmod SF_{\min}$  for each transition, respectively. Here,  $SF_{\min} = \min\{SF_{\text{PICH}}, SF_{\text{DCCH}}, SF_{\text{SCH2}}, SF_{\text{SCH1}}, SF_{\text{FCH}}\}$ .

15 (1) For  $n \equiv 0 \bmod SF_{\min}$

## 【EQUATION 35】

$$\begin{aligned}
& \frac{I_T[n] + jQ_T[n]}{I_T[n-1] + jQ_T[n-1]} \\
&= \frac{\left( D_{SCH1} \left[ \left\lfloor \frac{n}{SF_{min}} \right\rfloor \right] + jD_{SCH2} \left[ \left\lfloor \frac{n}{SF_{min}} \right\rfloor \right] \right)}{\left( D_{SCH1} \left[ \left\lfloor \frac{n-1}{SF_{min}} \right\rfloor \right] + jD_{SCH2} \left[ \left\lfloor \frac{n-1}{SF_{min}} \right\rfloor \right] \right)} \cdot \frac{H_{SCH1}[n] + jH_{SCH2}[n]}{H_{SCH1}[n-1] + jH_{SCH2}[n-1]} \\
& \quad \cdot \frac{C_I[n] + jC_Q[n]}{C_{scramble,I}[n-1] + jC_{scramble,Q}[n-1]} \\
& \arg \left\{ \frac{I_T[n] + jQ_T[n]}{I_T[n-1] + jQ_T[n-1]} \right\} \in \left\{ 0, +\frac{\pi}{2}, -\frac{\pi}{2}, \pi \right\}
\end{aligned}$$

(2) For  $n \not\equiv \text{mod } SF_{min}$

【EQUATION 36】

$$\begin{aligned}
& \frac{I_T[n] + jQ_T[n]}{I_T[n-1] + jQ_T[n-1]} \\
&= jC_2[n-1] H_{SCH1}[n] H_{SCH2}[n] H_{SCH1}[n-1] H_{SCH2}[n-1] \frac{NUM[n-1]}{DEN[n-1]} \\
&= jC_2[n-1] H_a[n] H_a[n-1] \frac{NUM[n-1]}{DEN[n-1]} \\
& NUM[n-1] = (C_I[n-2] H_{SCH1}[n-2] - C_Q[n-2] H_2[n-2]) \\
& \quad + jH_a[n] (C_I[n-2] H_{SCH1}[n-2] + C_Q[n-2] H_2[n-2]) \\
&= \begin{cases} (C_I[n-2] H_{SCH1}[n-2] - C_Q[n-2] H_2[n-2]) \\ jH_a[n] (C_I[n-2] H_{SCH1}[n-2] + C_Q[n-2] H_2[n-2]) \end{cases} \\
& DEN[n-1] = C_I[n-2] H_{SCH1}[n-2] - C_Q[n-2] H_2[n-2] \\
& \quad + jH_a[n-1] (C_I[n-2] H_{SCH1}[n-2] + C_Q[n-2] H_2[n-2]) \\
&= \begin{cases} (C_I[n-2] H_{SCH1}[n-2] - C_Q[n-2] H_2[n-2]) \\ jH_a[n-1] (C_I[n-2] H_{SCH1}[n-2] + C_Q[n-2] H_2[n-2]) \end{cases} \\
& \arg \left\{ \frac{I_T[n] + jQ_T[n]}{I_T[n-1] + jQ_T[n-1]} \right\} = C_2[n-1] H_a[n] H_a[n-1] \frac{\pi}{2} + \arg \left\{ \frac{H_a[n]}{H_a[n-1]} \right\} \\
& \quad = \pm \frac{\pi}{2} + \arg \left\{ \frac{H_a[n]}{H_a[n-1]} \right\} \\
& \quad \in \left\{ +\frac{\pi}{2}, -\frac{\pi}{2} \right\}
\end{aligned}$$

5 Where  $H_a[n] = H_{SCH1}[n] H_{SCH2}[n]$ . With the bit-wise XOR



(eXculisive OR) operation in EQUATION 6,  $(a)_2 = (SCH1)_2 \oplus (SCH2)_2$ .

In the OCQPSK or POCQPSK spreading modulation, as mentioned earlier, the orthogonal Walsh codes with even number subscripts are used except for the inevitable cases such as the case with the high transmitting data rate for a certain channel of spreading factor (SF) of 2. However, the DCQPSK spreading modulation supports the variable spreading factor keeping the orthogonal channel property with any orthogonal codes as shown in the previous equations. Thus the orthogonal code is represented by "H" instead of "W" representing the orthogonal Walsh code. The spreading factor (SF) or size of the orthogonal code need not be the power of 2.

The outputs  $(I_T[n], Q_T[n])$  of the Spreading Modulator (141) pass through the low-pass filters (160, 162) and the amplifiers (170, 172). Then the amplified outputs are delivered to the modulators (180, 182) which modulate the signals into the desired frequency band using a carrier. And the modulated signals are added by the adder (190), and

delivered to an antenna.

FIG. 12 shows a schematic diagram for a receiver according to the transmitter of FIG. 11a. The received signals through the antenna are demodulated at the demodulators (280, 282) with the same carrier used at the transmitter, and  $I_R[n]$  and  $Q_R[n]$  are generated after the signals pass through the low-pass filters (260, 262). Then, the spreading demodulator (241) produces the signals ( $x_R[n]$ ,  $y_R[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ). The spreading demodulator (241) comprises the scrambling code generator (530) and the complex-domain multiplier (243). The scrambling code generator (520) produces the secondary scrambling codes ( $C_{\text{scramble}, i}[n]$ ,  $C_{\text{scramble}, q}[n]$ ) with the primary scrambling codes ( $C_1[n]$ ,  $C_2[n]$ ) as the inputs to improve the PAR characteristic. The complex-domain multiplier (243) takes  $I_R[n]$  and  $Q_R[n]$  as the first inputs and the secondary scrambling codes ( $C_{\text{scramble}, i}[n]$ ,  $C_{\text{scramble}, q}[n]$ ) as the second inputs. The first and secondary scrambling codes are generated by the same method as in the transmitter.

In order to pick up the desired channels among the outputs  $(x_R[n], y_R[n])$  of the spreading demodulator (241), the signals are multiplied by the same orthogonal code  $H_{xxCH}[n]$  (where,  $xxCH = DCCH$  or FCH) used in the transmitter, at the de-spreaders (1224, 1226) or the signal are multiplied in complex-domain at the complex-domain multiplier (245) in FIG. 12 with the same orthogonal code  $H_{xxCH}[n]$  (where,  $xxCH = SCH1$  or  $SCH2$ ) used in the transmitter. Now, the signals are integrated during the symbol period  $T_{2x}$  or  $T_{2y}$ . Since the signals at the receiver are distorted,  $PiCH$  is used to correct the distorted signal phase. Accordingly, the signals  $(x_R[n], y_R[n])$  are multiplied by the corresponding orthogonal code  $H_{PiCH}[n]$ , and are integrated during the period of  $T_1$  at the integrators (210, 212).

The reverse link  $PiCH$  in the cdma2000 system may include additional information such as a control command to control the transmitting power at the receiver, besides the pilot signals for the phase correction. In this case, the additional information is extracted by the de-multiplexer, and the phase is

estimated using the part of the pilot signals having the known phase. The phase corrections are performed at the complex-domain multipliers (242, 246) using the estimated phase information through the  
5 integrators (210, 212).

The DCQPSK spreading modulation according to the present invention yields the following effects: First, the PAR characteristic is improved because the probability of the origin crossing transition  
10 ( $\square$ -transition) becomes zero only except for the time when the spread transmitting data vary. Second, the flexibility for the channel allocation becomes better because the DCQPSK can use all orthogonal codes while the OCQPSK or POCQPSK should use the  
15 orthogonal Walsh codes with even number subscripts.

While the foregoing invention has been described in terms of the embodiments discussed above, numerous variations are also possible. Accordingly, modifications and changes such as those  
20 suggested above, but not limited thereto, are considered to be within the scope of the following claims.

**WHAT IS CLAIMED IS:**

1. A transmitting method in CDMA (Code Division  
5 Multiple Access) systems with a transmitting  
apparatus and receiving apparatus, comprising the  
steps of:

(a) generating a pilot signal and transmitting data  
signals for several channels with different  
10 information; (b) spreading the signal using a  
orthogonal code for each channel; (c) adding the  
spread signals; (d) scrambling the added signals  
using PN (Pseudo-Noise) sequences; (e) modulating  
the scrambled signals with carrier; and (f)  
15 transmitting a composite signal created by adding  
the modulated signals.

2. A transmitting method as defined in claim 1,  
wherein the spreading step and the scrambling step  
perform an orthogonal complex-domain spreading and a  
20 complex-domain scrambling, respectively, in order to  
improve the PAR (Peak-to-Average power Ratio)  
characteristic of the transmitter.



3. A transmitting method as defined in claim 2,  
 wherein the second complex-domain scrambling codes  
 $(C_{\text{scramble}, I}[n], C_{\text{scramble}, Q}[n])$  in the scrambling step  
 are given by the following equations in terms of the  
 5 primary scrambling codes  $(C_1[n], C_2[n])$ :

(a) when the spreading data vary,

【EQUATION 37】

$$C_{\text{scramble}, I}[n] + j C_{\text{scramble}, Q}[n] = C_1[n] + C_2[n];$$

and

10 (b) when the spreading data do not vary,

【EQUATION 38】

$$C_{\text{scramble}, I}[n] + j C_{\text{scramble}, Q}[n] = -C_2[n] C_{\text{scramble}, Q}[n-1] H_b[n-1] H_b[n] + j C_2[n] C_{\text{scramble}, I}[n-1] H_a[n-1] H_a[n].$$

4. A transmitting method as defined in claim 2  
 15 or 3, wherein the orthogonal complex-domain  
 spreading is performed with orthogonal Hadamard  
 codes and the scrambling codes for the complex-  
 domain scrambling are produced using orthogonal  
 Hadamard codes.

20 5. A transmitting method as defined in claim 2,  
 wherein the orthogonal complex-domain spreading is  
 performed with orthogonal Walsh codes and the

scrambling codes for the complex-domain scrambling are generated using orthogonal Hadamard codes.

6. A transmitting method as defined in claim 2, wherein the orthogonal complex-domain spreading is performed with orthogonal Gold codes and the scrambling codes for the complex-domain scrambling are generated using orthogonal Hadamard codes.

7. A receiving method in CDMA (Code Division Multiple Access) systems with a transmitting apparatus and receiving apparatus, comprising the steps of:

(a) demodulating the transmitted signal using the same carrier used in the transmitter; (b) de-scrambling the demodulated signal using the synchronized identical PN (Pseudo-Noise) sequences of the transmitter; (c) de-spreading the de-scrambled signal using the synchronized identical orthogonal codes of the transmitter for each channel; and (d) recovering the transmitted data from the de-spread signals.

8. A receiving method as defined in claim 7, wherein the de-scrambling step and the de-spreading

step perform a complex-domain de-scrambling and an orthogonal complex-domain de-spreading.

9. A receiving method as defined in claim 8, wherein the complex-domain de-scrambling codes and the orthogonal complex-domain de-spreading codes are the same as those used in the complex-domain scrambling and the orthogonal complex-domain spreading of the transmitter.

10. A transmitting apparatus in CDMA (Code Division Multiple Access) system with the transmitting apparatus and receiving apparatus, comprising:

(a) means for generating a pilot signal and transmitting data signals for several channels with different information; (b) means for controlling the signal-gains of the channels; (c) means for spreading the gain-controlled signal for each channel; (d) a first complex-domain multiplying means for performing the first orthogonal complex-domain spreading with the inputs of the transmitting data of the supplementary channels and of the OVSF (Orthogonal Variable Spreading Factor) codes; (e)



means for adding the output of the first complex-domain multiplying means and the spread signal; (f) a spreading modulator, comprising a complex-domain multiplier and a scrambling code generator, for  
5 modulating the added signal; (g) means for amplifying the low-pass filtered signal power; (h) means for modulating the amplified signal to the desired frequency band; and (i) means for adding the modulated signals.

10 11. A receiving apparatus in CDMA (Code Division Multiple Access) systems with a transmitting apparatus and receiving apparatus, comprising:

(a) means for demodulating the transmitted signal  
15 from an antenna using the same carrier used in the transmitter; (b) a spreading de-modulator, comprising a scrambling code generator and complex-domain multiplying means, for de-scrambling the low-pass filtered demodulated signal; (c) means for de-  
20 spreading the de-scrambled signal to get the desired channel by integrating for the symbol period proportional to the data rate of the corresponding

channel; and (d) second complex-domain multiplying means for correcting the phase of the de-spread signal.

12. A receiving apparatus as defined in claim 5 11, wherein the carrier used in the demodulating means of (a) in claim 11 are the same waves used in the transmitter.



2/21

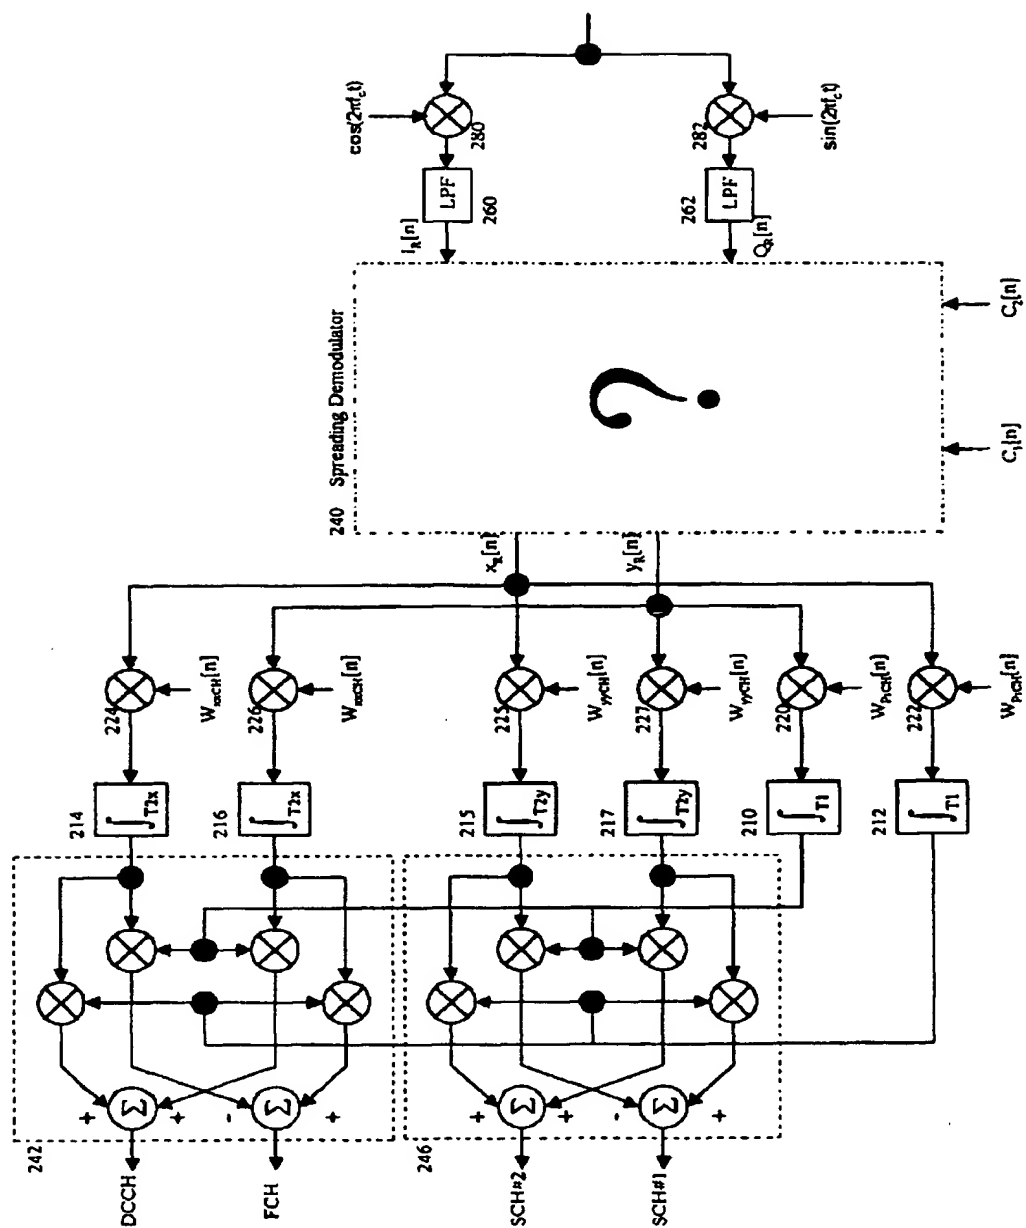


FIG. 2

3/21

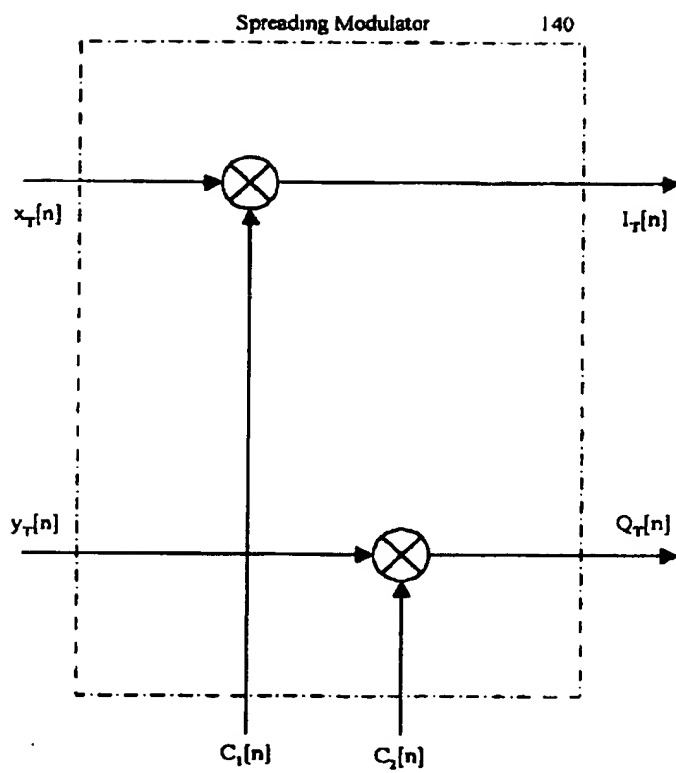


FIG. 3a



4/21

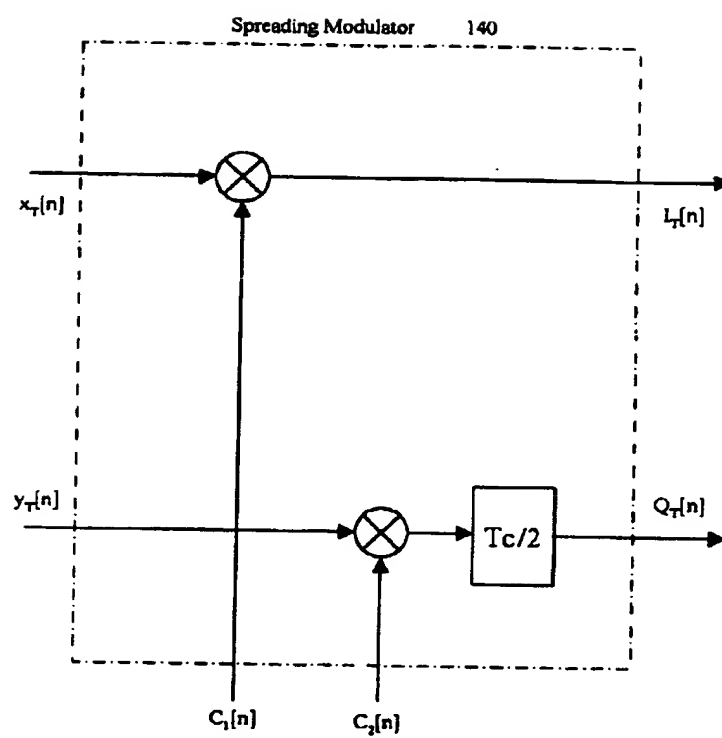


FIG. 3b

5/21

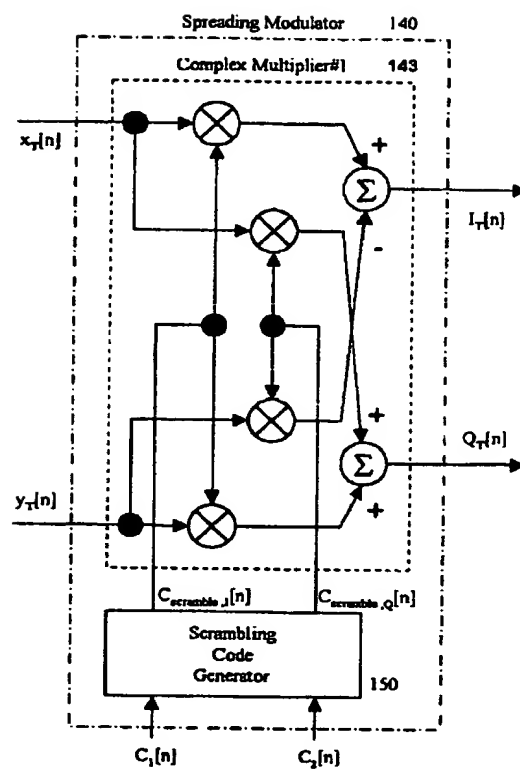


FIG. 3c

6/21

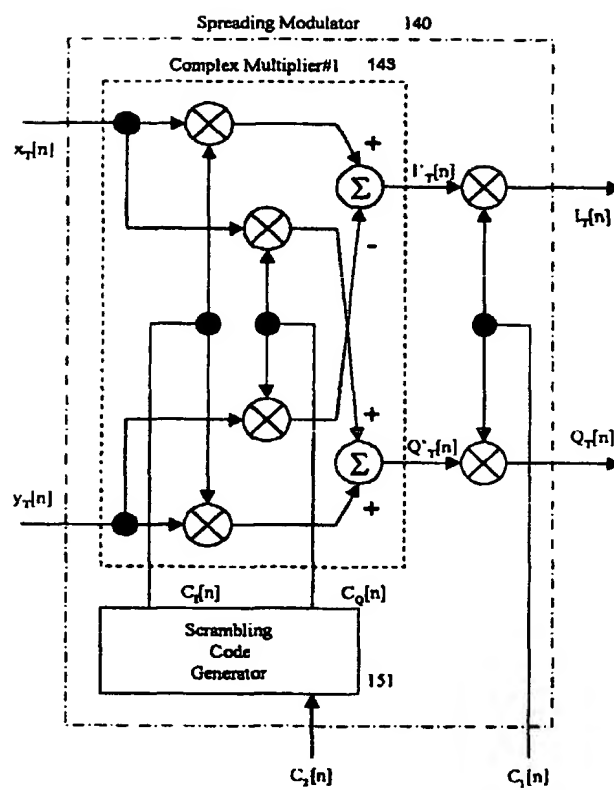


FIG. 3d

7/21

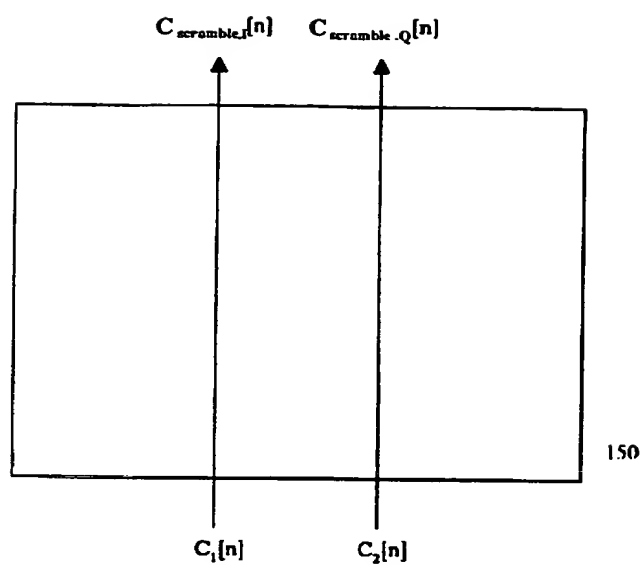


FIG. 4a

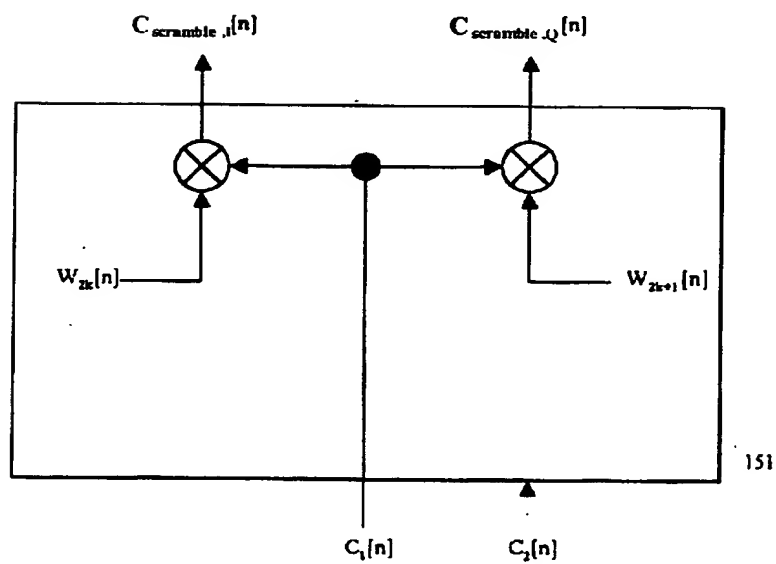


FIG. 4b

8/21

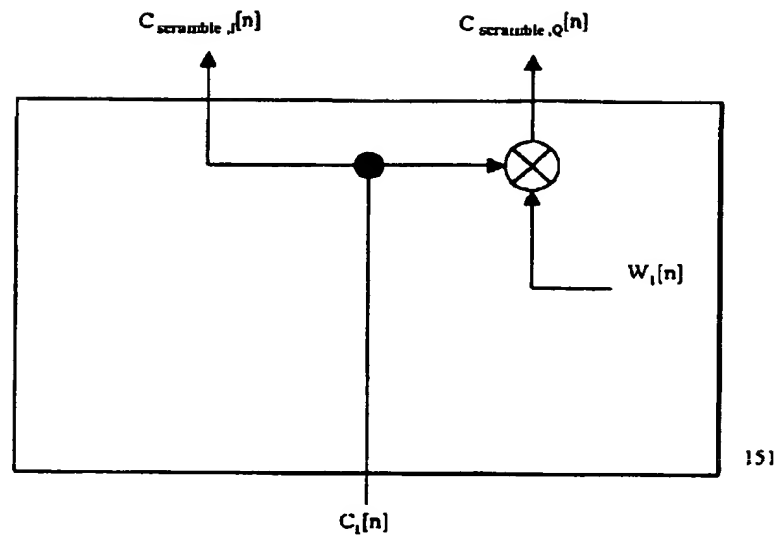


FIG. 4c

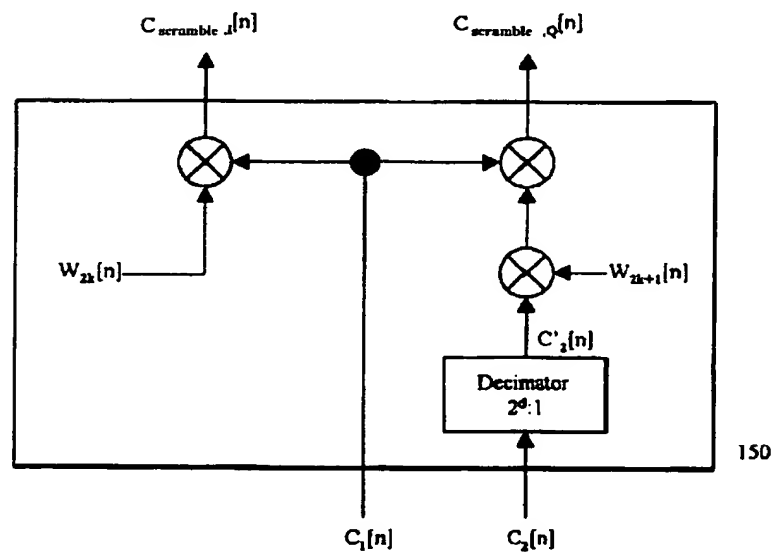


FIG. 4d

9/21

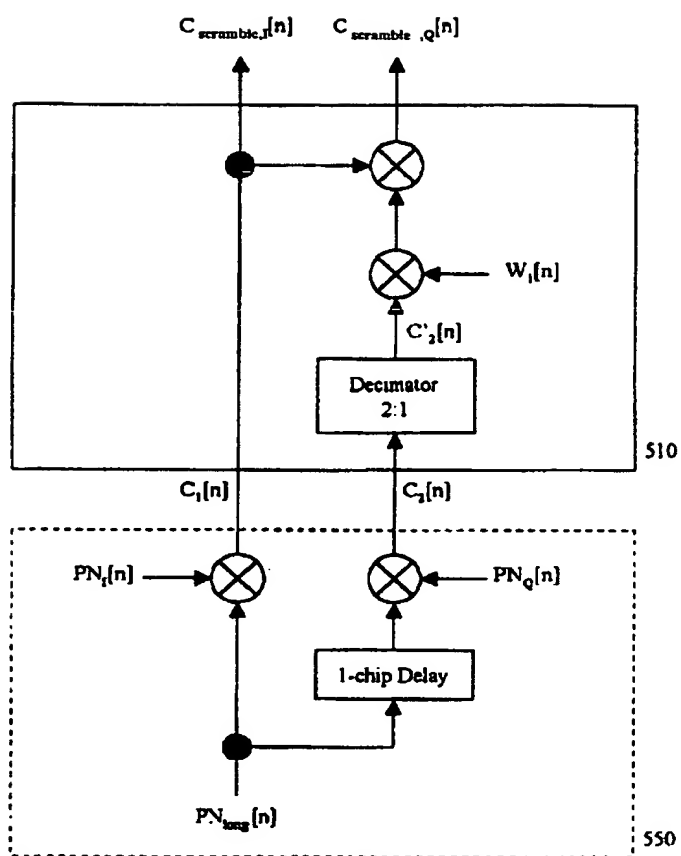


FIG. 5a

10/21

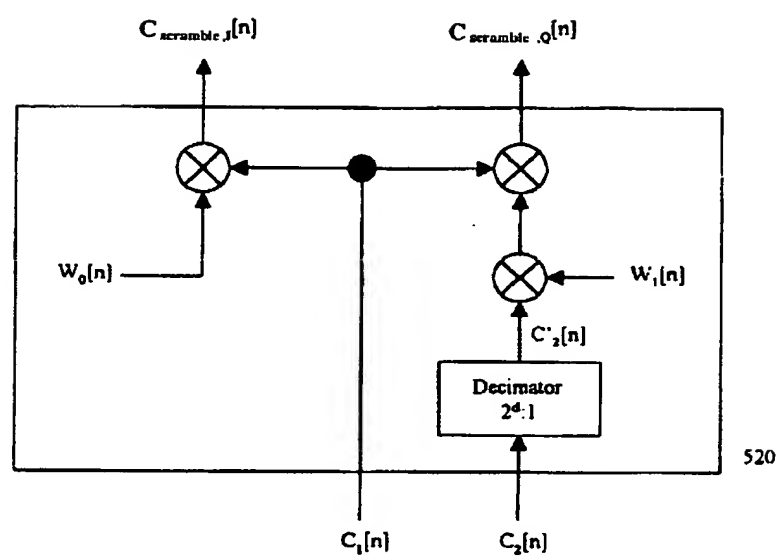


FIG. 5b

11/21

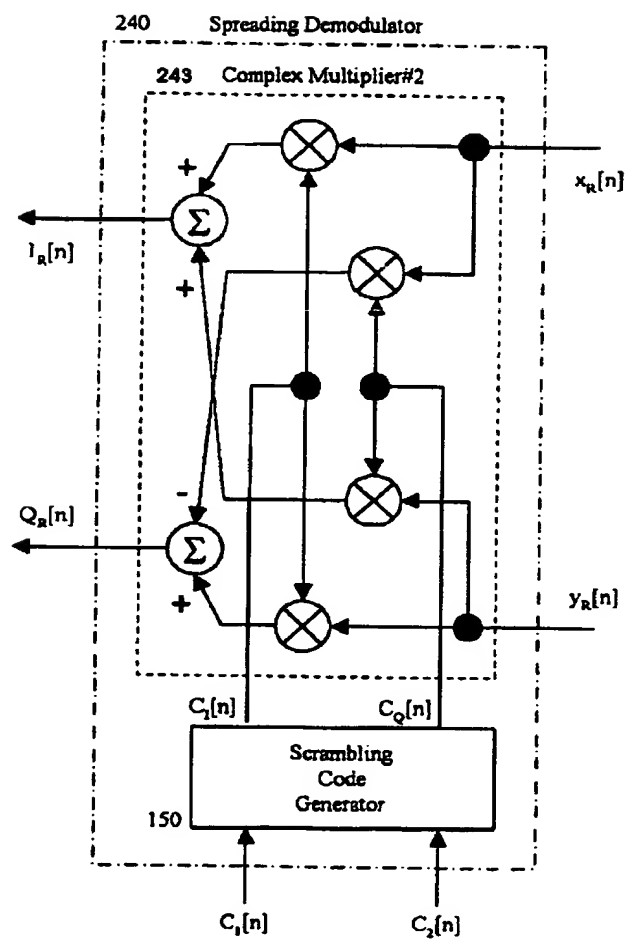


FIG. 6a



12/21

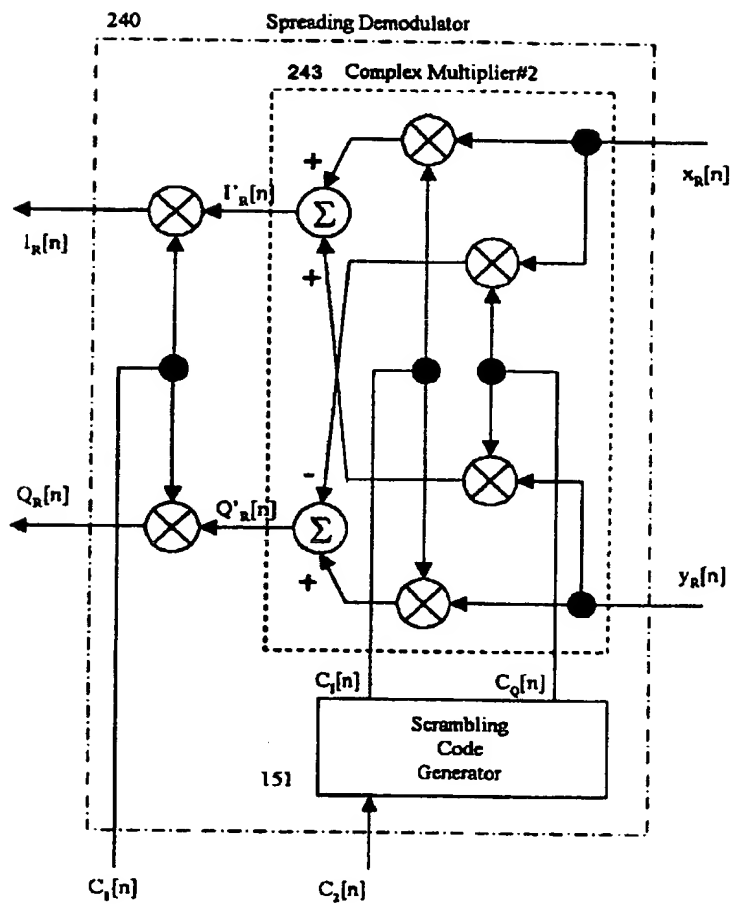


FIG. 6b

13/21

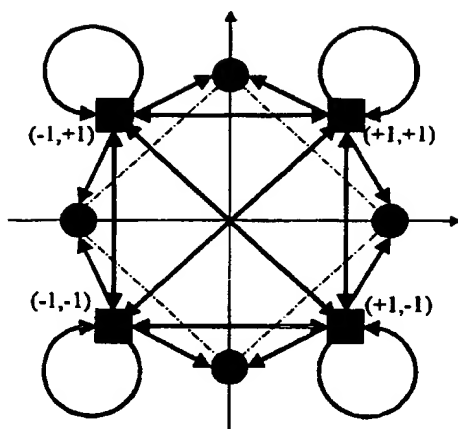


FIG. 7a

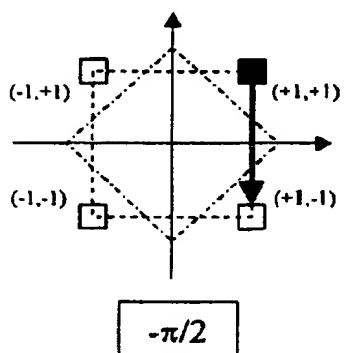

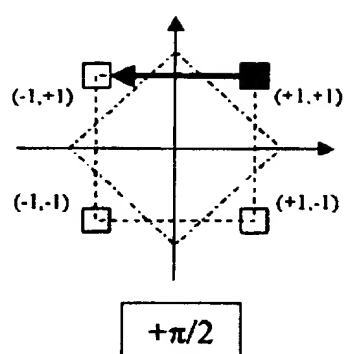
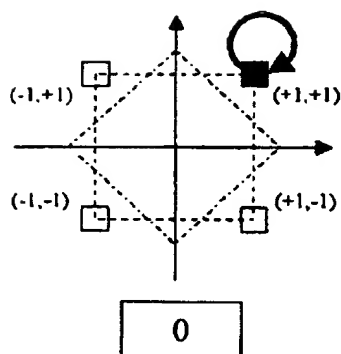


FIG. 7b

14/21

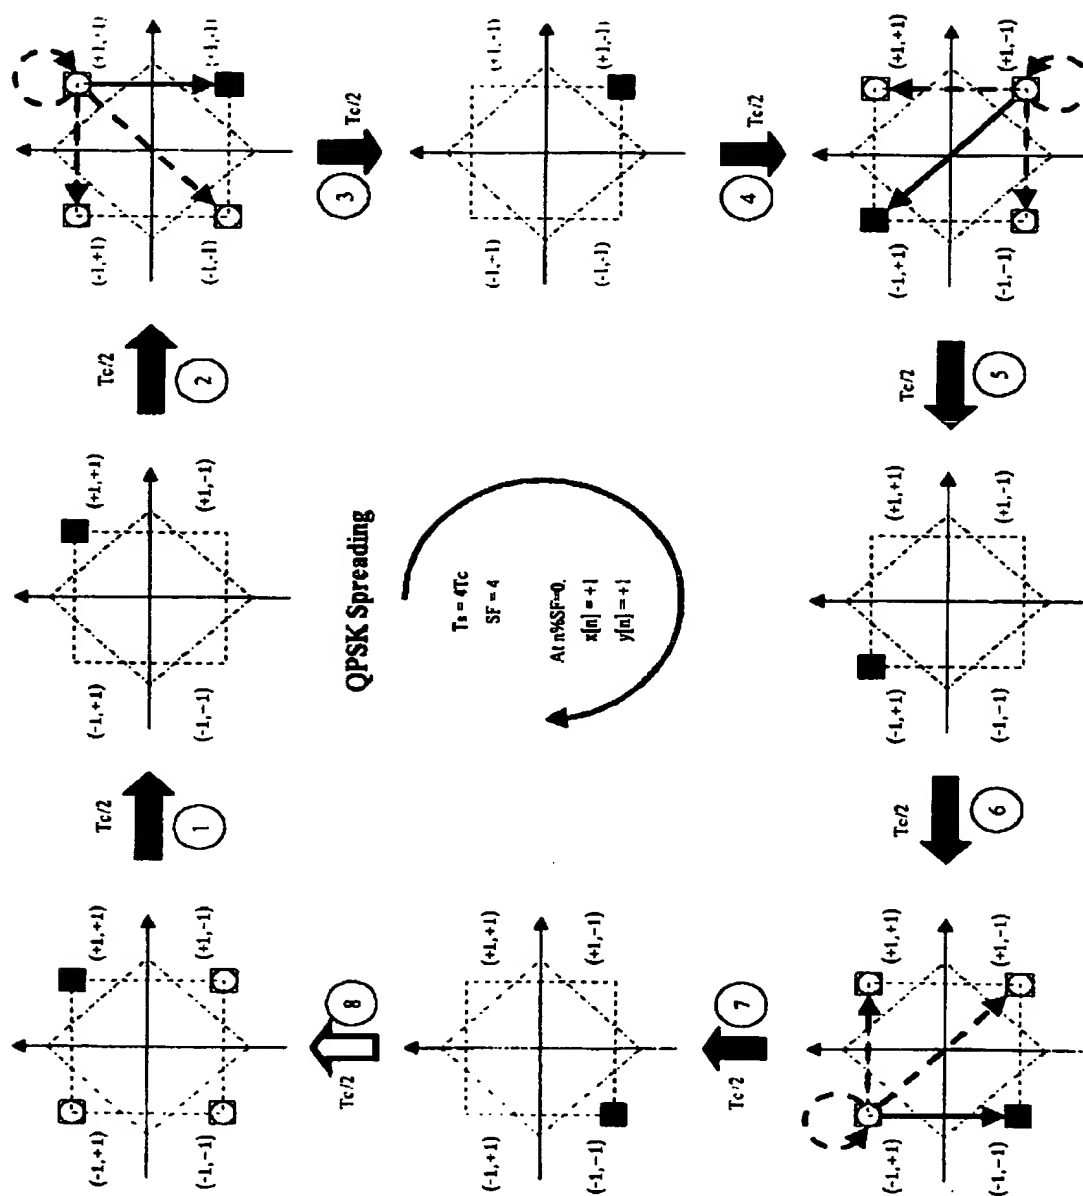


FIG. 8a

15/21

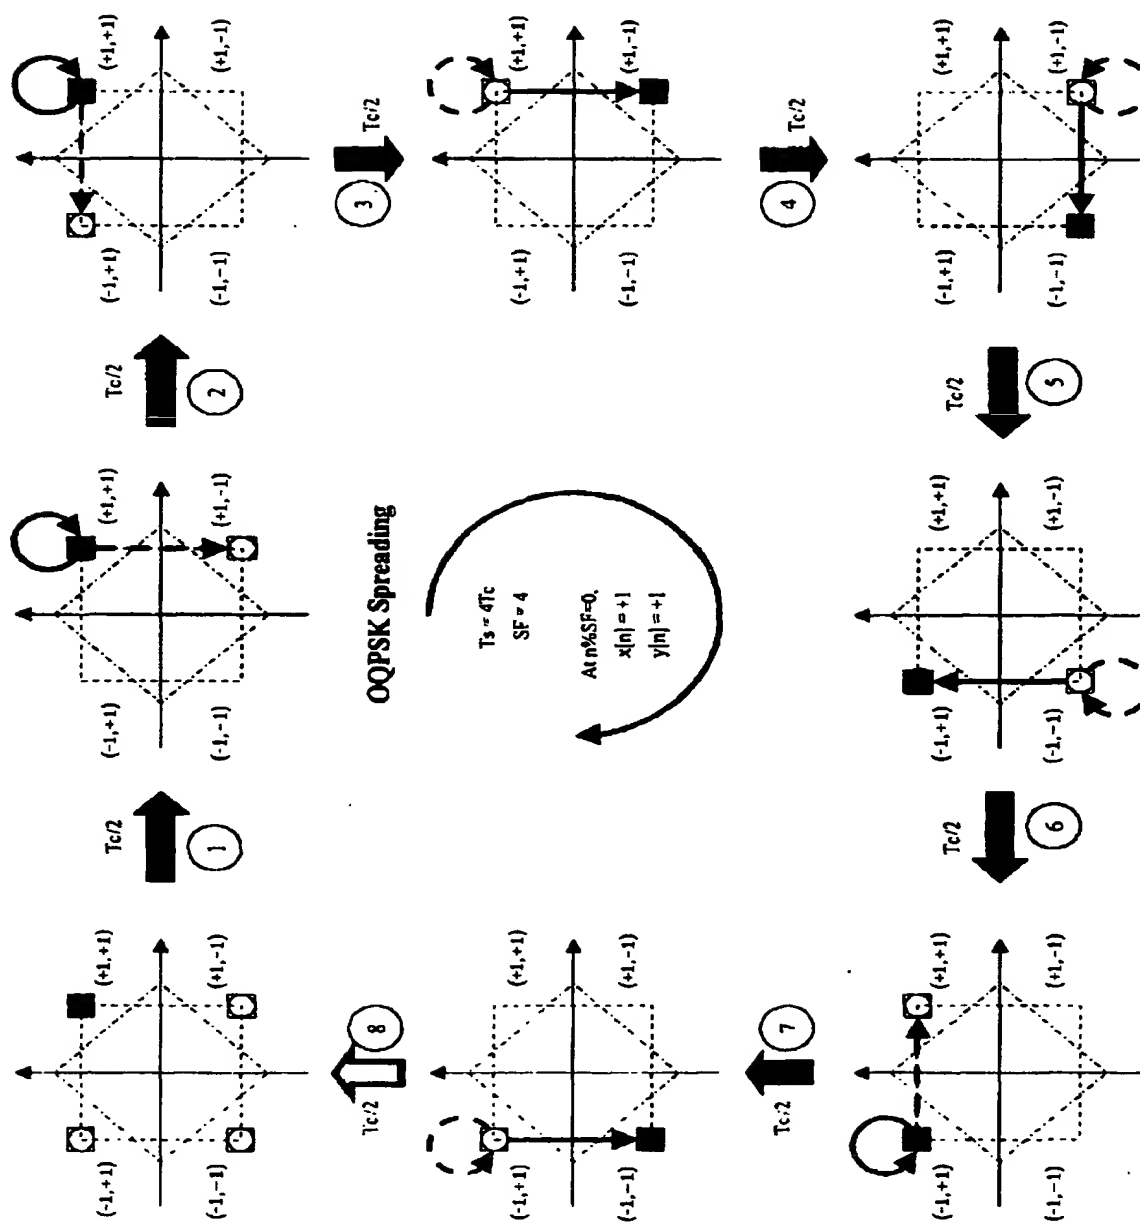


FIG. 8b

16/21

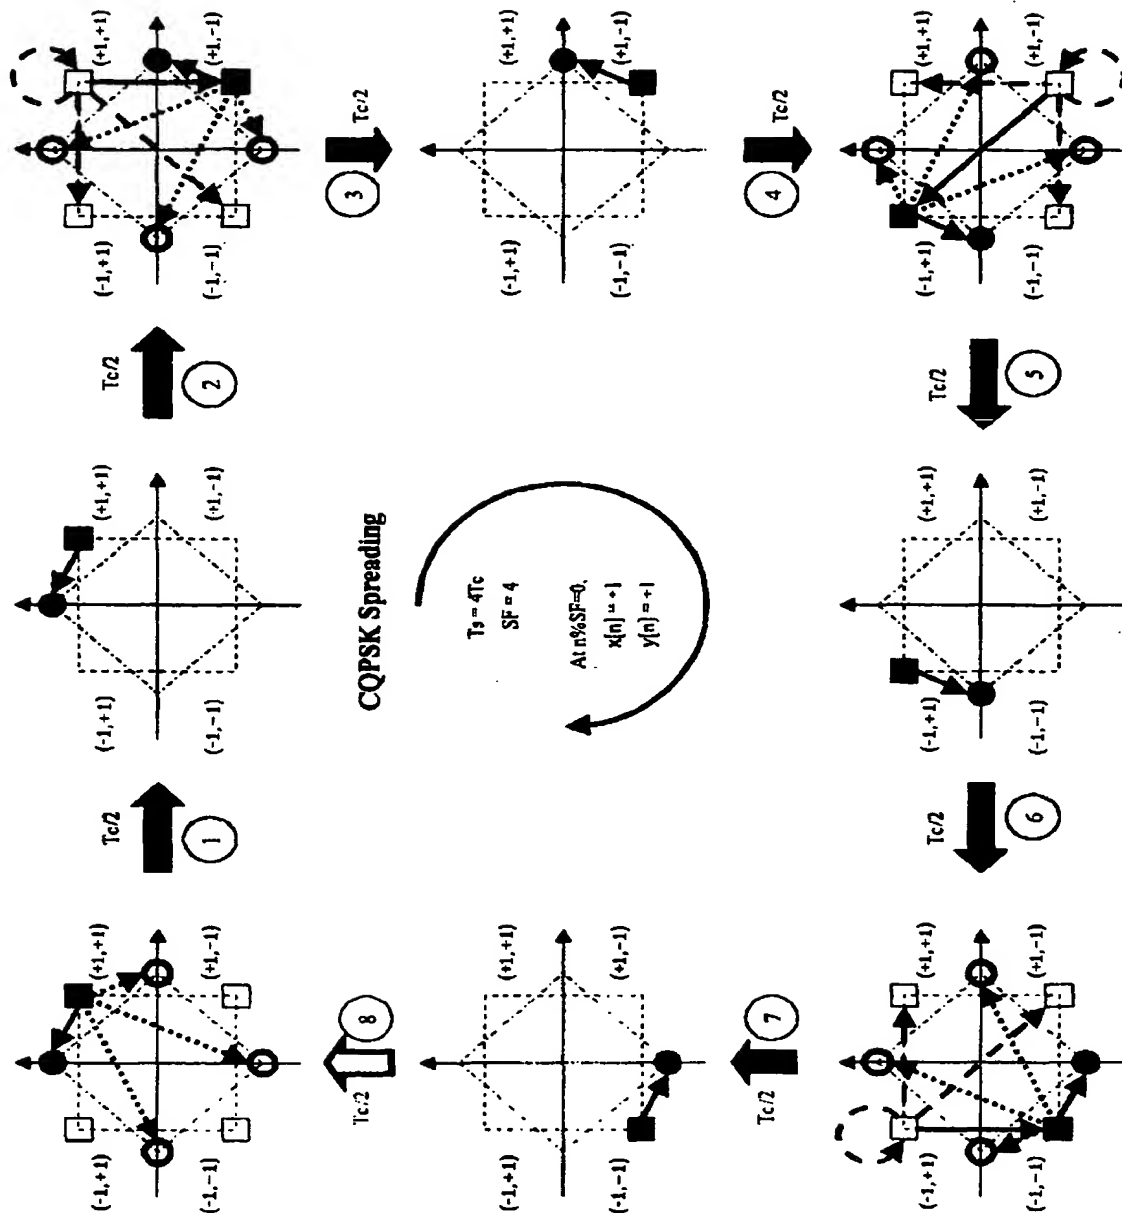


FIG. 8c

17/21

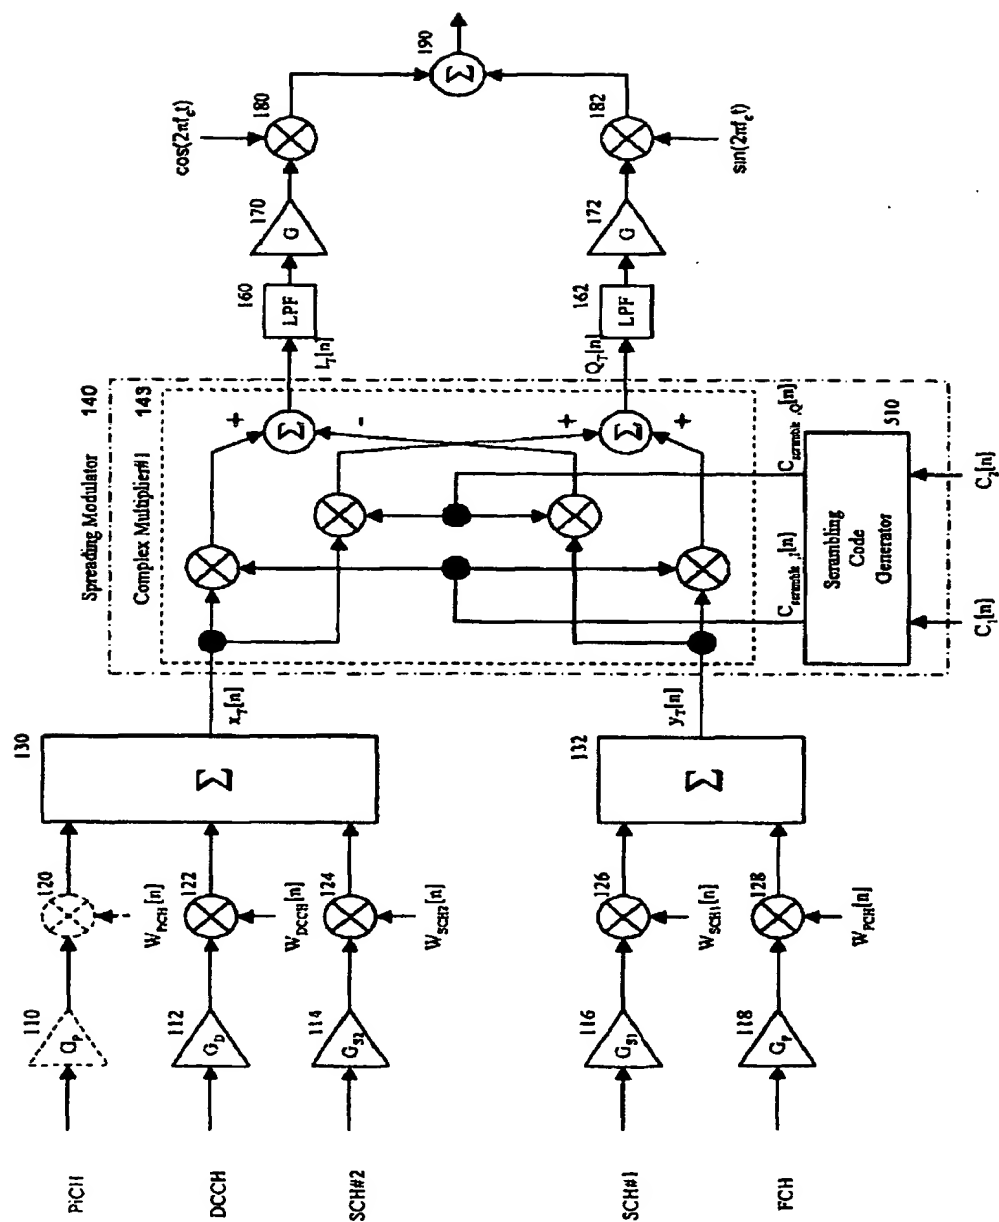


FIG. 9

18/21

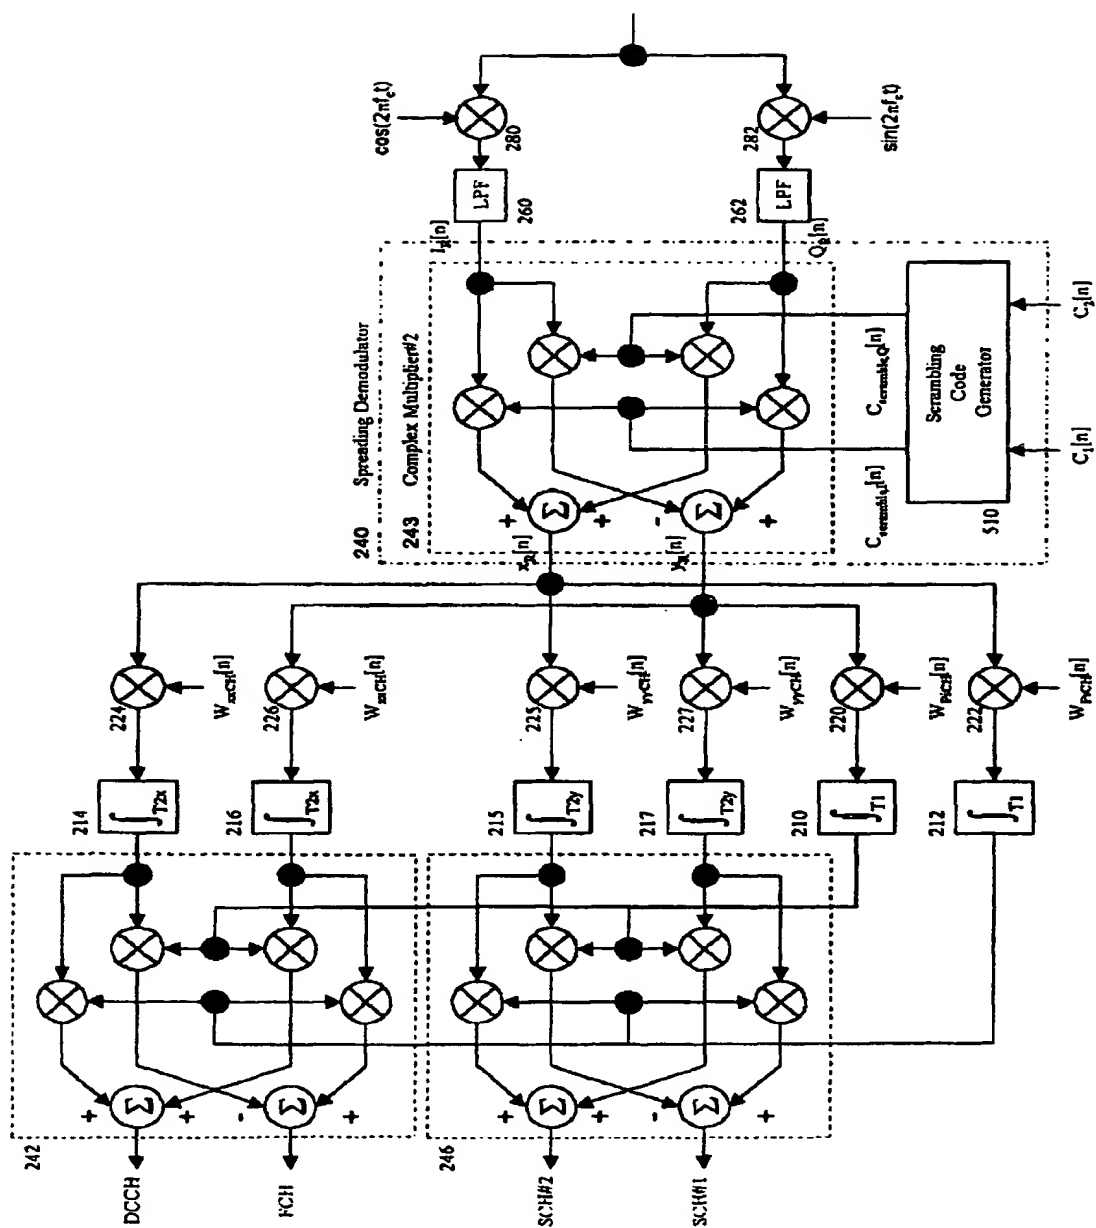


FIG. 10

19/21

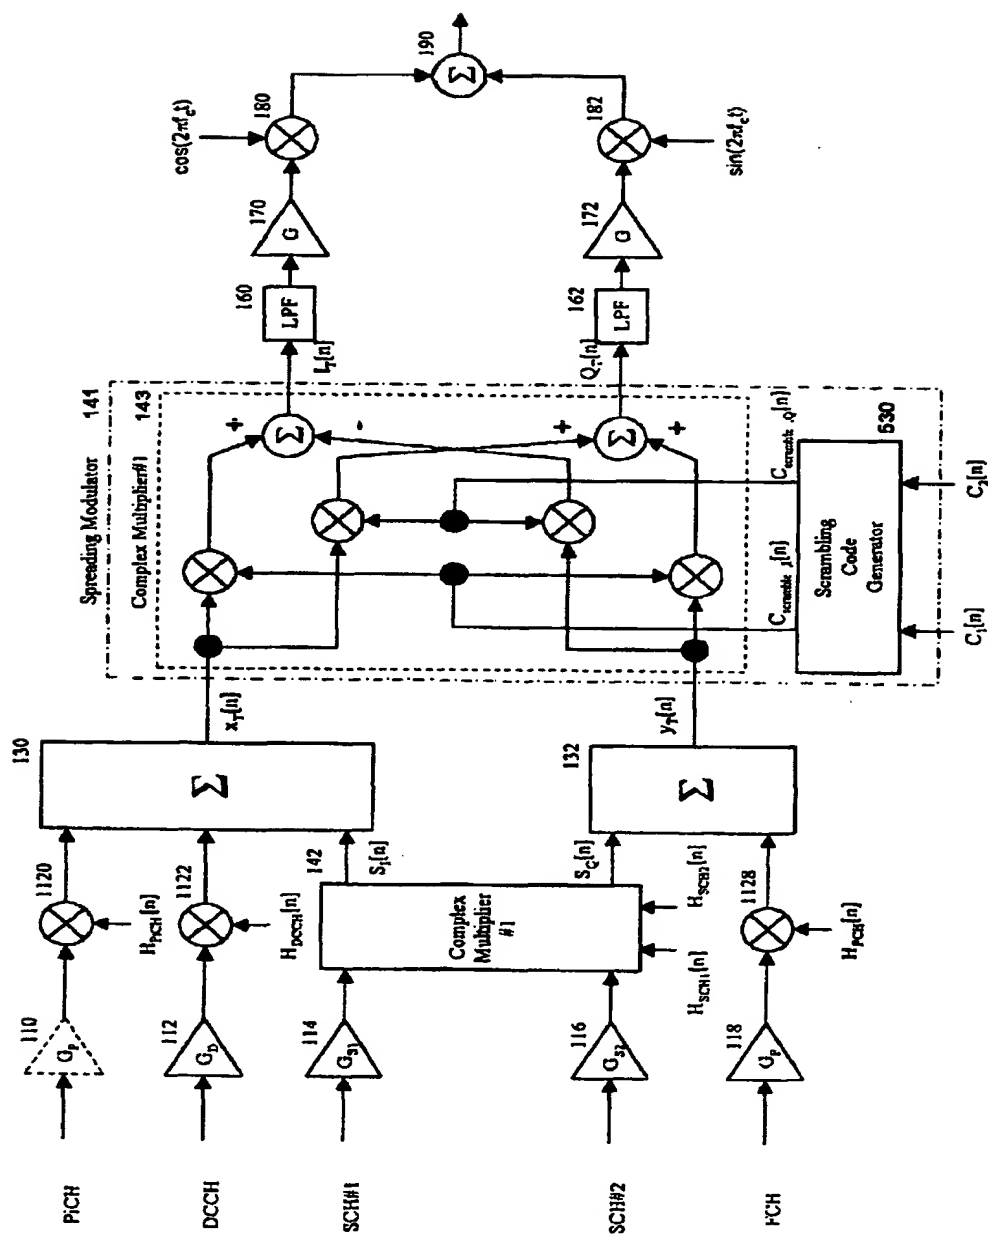


FIG. 11a



20/21

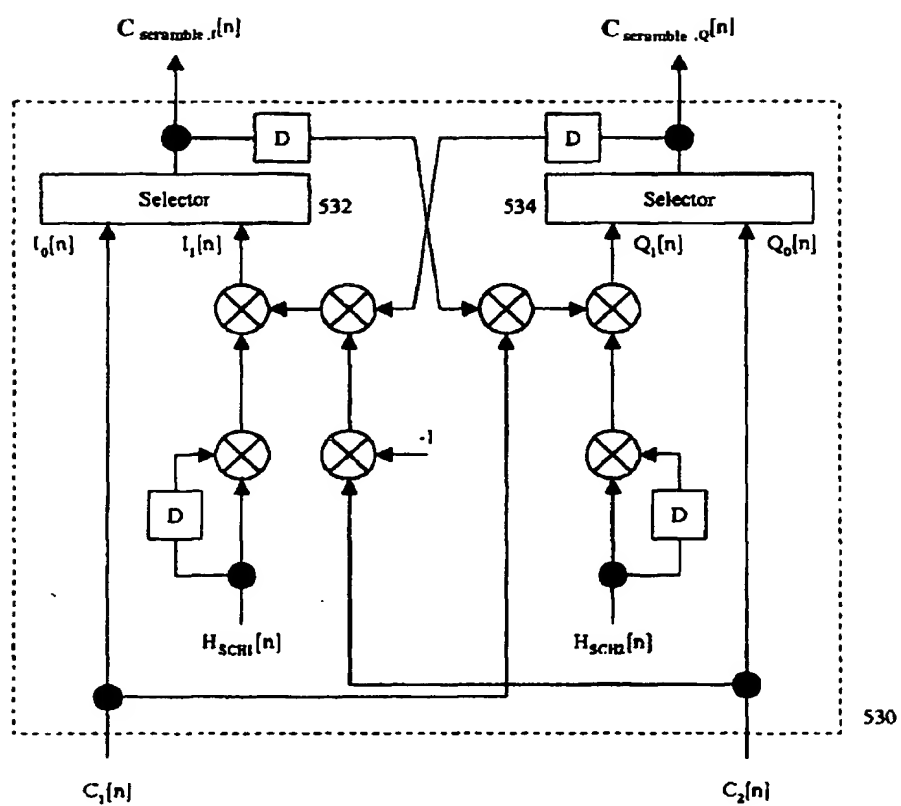


FIG. 11b

21/21

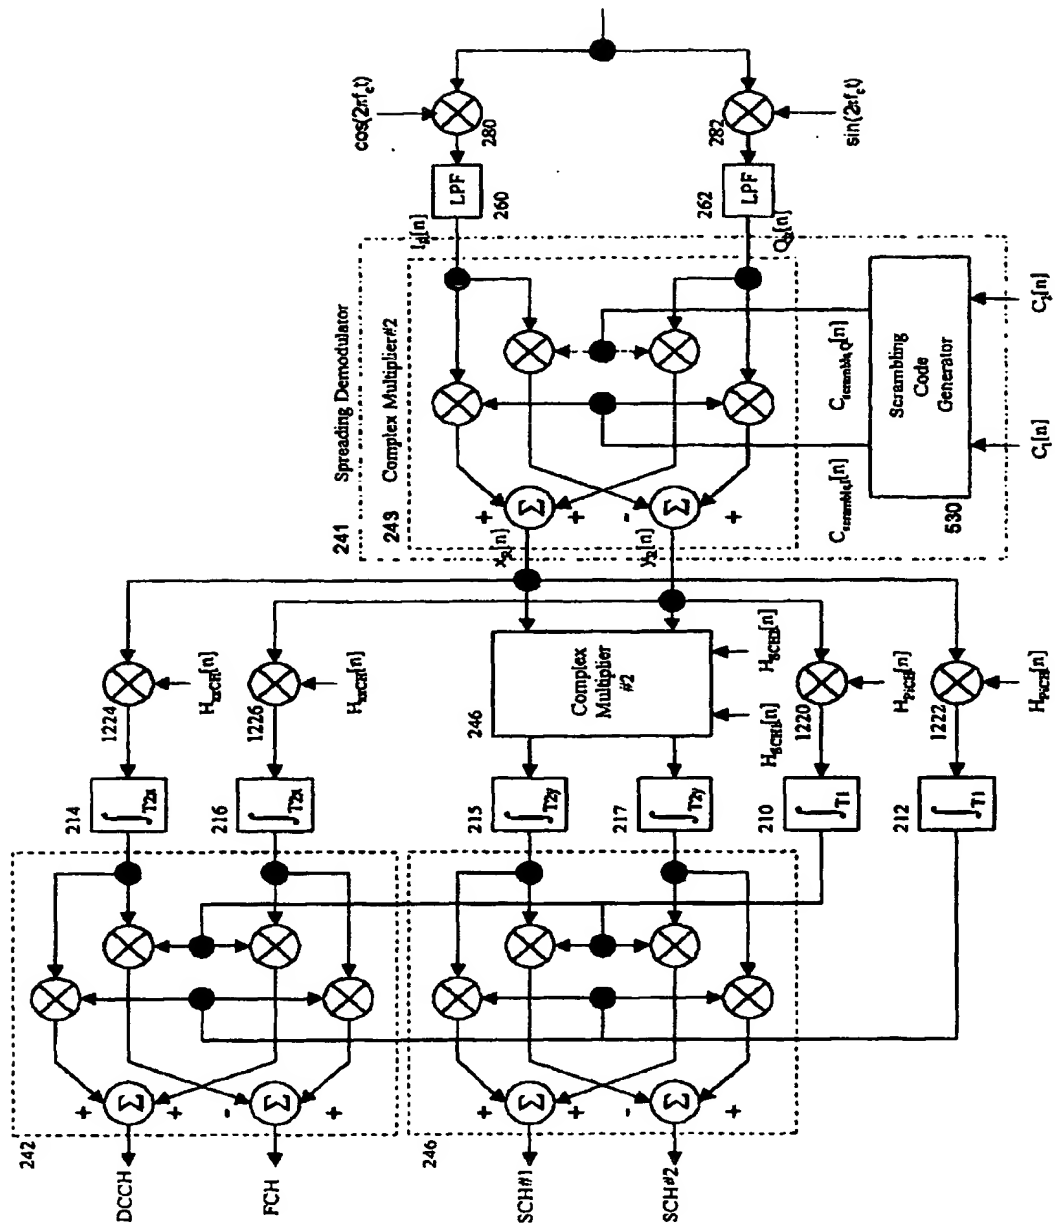


FIG. 12

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
7 June 2001 (07.06.2001)

PCT

(10) International Publication Number  
WO 01/41318 A3(51) International Patent Classification<sup>7</sup>: **H04J 13/02**,  
H04L 27/30, H04B 1/707

(21) International Application Number: PCT/KR00/01385

(22) International Filing Date:  
30 November 2000 (30.11.2000)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:  
1999/54963 4 December 1999 (04.12.1999) KR(71) Applicant (for all designated States except US): **KOREA  
ADVANCED INSTITUTE OF SCIENCE AND TECH-  
NOLOGY [KR/KR]: #373-1, Kusong-dong, Yusong-gu,  
Taejon 305-701 (KR).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIM, Jong,**Myeong [KR/KR]; 108-203, Jugong APT, Ok Po 2dong,  
Keoje. Kyung Nam 656-132 (KR). **PARK, Su, Won**  
[KR/KR]; Department of Electrical Engineering, KAIST,  
Kusong-Dong, Yusong-Ku, Taejon 305-701 (KR). **SUNG,  
Dan, Keun** [KR/KR]; 103-1503, Hanwool APT, Shin  
Sung-Dong, Yusong-Ku, Taejon 305-345 (KR).(74) Agent: **LEE, Jong, II**; #904 BYC Building, 648-1, Yeok-  
sam-dong, Kangnam-ku, Seoul 135-080 (KR).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

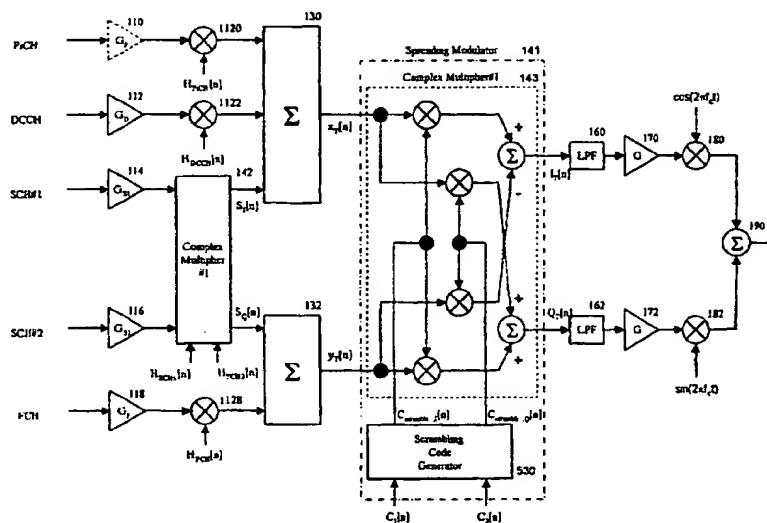(54) Title: METHOD AND APPARATUS FOR SPREADING MODULATION IN SPREAD SPECTRUM COMMUNICATIONS  
SYSTEMS

RECEIVED

APR 24 2002

Technology Center 2600

RECEIVED

MAY 08 2002

Technology Center 2600

(57) Abstract: The present invention is related to a method and an apparatus for the orthogonal complex-domain spreading modulation in CDMA spread spectrum communication system when there are channels with statistically higher transmitting power. In CDMA spread spectrum communication systems with a transmitter and a receiver, the transmitter according to the invention has several channels with different information. Two channels with higher power than the others, which are spread in the conventional scheme, are spread with the orthogonal codes using a complex-domain multiplier (142). The spread signals are added. Then the signals are scrambled using a complex-domain multiplier (143) with secondary scrambling sequences generated by a special scrambling code generator (530) with primary scrambling sequences as inputs. The receiver does reverse operation of the transmitter.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

27 December 2001

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 00/01385

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: H04J 13/02, H04L 27/30, H04B 1/707

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: H04J 11/00, 13/00, 13/02, H04B 1/69, 1/707, 7/26, H04L 27/30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5309474 A (GILHOUSEN K., et al.) 3 May 1994 (03.05.94) <i>fig. 4c, claims 1-9, 12, 18, 22, 27.</i>	1-12
A	US 5870378 A (TEN B.S., et al.) 9 February 1999 (09.02.99) <i>fig. 2, claims 1, 15, 18.</i>	7-12
----		

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&amp;“ document member of the same patent family

Date of the actual completion of the international search

23 May 2001 (23.05.2001)

Date of mailing of the international search report

8 June 2001 (08.06.2001)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

FUSSY

Telephone No. 1/53424/328

Form PCT/ISA/210 (second sheet) (July 1998)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 00/01385

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	A	5309474	03-05-1994	AU	A1 84016/91	23-01-1992
				AU	B2 652956	15-09-1994
				BG	A 97222	27-05-1994
				BG	B1 61514	31-10-1997
				BR	A 9106592	08-06-1993
				CA	AA 2085890	26-12-1991
				CN	A 1061312	20-05-1992
				CN	B 1057884	25-10-2000
				CZ	A3 9203871	17-11-1993
				CZ	B6 283123	14-01-1998
				EP	A1 536334	14-04-1993
				EP	A4 536334	01-12-1993
				EP	A1 1104955	06-06-2001
				FI	A 925812	21-12-1992
				FI	A0 925812	21-12-1992
				HU	A0 9204111	29-03-1993
				HU	A2 64657	28-01-1994
				HU	B 216989	28-10-1999
				IL	A0 98598	15-07-1992
				JP	T2 6501349	10-02-1994
				JP	B2 2958433	06-10-1999
				JP	A2 11317691	16-11-1999
				KR	B1 134390	27-04-1998
				MX	B 173818	29-03-1994
				NO	A 925019	23-12-1992
				NO	A0 925019	23-12-1992
				PT	A 98079	31-08-1993
				PT	B 98079	29-10-1999
				RU	C1 2125344	20-01-1999
				SG	A1 52735	28-09-1998
				SK	A3 3871/92	10-08-1994
				US	A 5103459	07-04-1992
				US	B1 5103459	06-07-1999
				WO	A1 9200639	09-01-1992
				ZA	A 9104847	29-04-1992
				US	A 5416797	16-05-1995
				US	A 5715236	03-02-1998
				US	A 5841806	24-11-1998
				US	A 5943361	24-08-1999
				US	A 5504773	02-04-1996
				US	A 5511073	23-04-1996
				US	A 5535239	09-07-1996
				US	A 5568483	22-10-1996
				US	A 5629955	13-05-1997
				US	A 5659569	19-08-1997
				AT	E 156954	15-08-1997
				AT	E 188583	15-01-2000
				AU	A1 34767/93	03-08-1993
				AU	B2 668378	02-05-1996
				AU	A1 47911/96	16-05-1996
				AU	B2 683597	13-11-1997
				BR	A 9305758	28-01-1997
				CN	A 1081040	19-01-1994
				DE	C0 69313098	18-09-1997
				DE	T2 69313098	12-03-1998
				DE	C0 69605953	10-02-2000
				DE	T2 69605953	17-08-2000
				DK	T3 621998	16-03-1998
				DK	T3 730356	19-06-2000
				EP	A1 621998	02-11-1994
				EP	A4 621998	18-01-1995
				EP	A2 730356	04-09-1996
				EP	A3 730356	20-11-1996
				EP	B1 621998	13-08-1997
				EP	B1 730356	05-01-2000
				ES	T3 2108260	16-12-1997
				ES	T3 2140754	01-03-2000
				FI	A0 943410	18-07-1994
				FI	A 943410	16-09-1994
				GR	T3 3025048	30-01-1998
				GR	T3 3032865	31-07-2000
				HK	A1 1000689	17-04-1998
				IL	A0 118832	31-10-1996
				IL	A1 104412	14-11-1996
				IL	A1 118832	10-03-1998

# INTERNATIONAL SEARCH REPORT

Information on parent family members

International application No.

PCT/KR 00/01385

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP T2 7506469	13-07-1995
		JP B2 3087910	18-09-2000
		KR B1 204160	15-06-1999
		NO A0 942670	15-07-1994
		NO A 942670	16-09-1994
		PL B1 172909	31-12-1997
		PT T 730356	30-06-2000
		RU C1 2116696	27-07-1998
		WO A1 9314588	22-07-1993
		ZA A 9300290	22-11-1993
		AU A1 47603/96	07-08-1996
		AU B2 694612	23-07-1998
		BR A 9606833	30-12-1997
		CA AA 2210657	25-07-1996
		EP A1 804836	05-11-1997
		FI A0 972990	14-07-1997
		FI A 972990	17-09-1997
		IL A0 116790	14-05-1996
		IL A1 116790	17-02-2000
		JP T2 10512415	24-11-1998
		WO A1 9622639	25-07-1996
		ZA A 9600181	14-10-1996
US A 5870378	09-02-1999	none	